

Experimental Investigation of Heat Transfer Enhancement from Pin Fins with Delta Winglet Vortex Generators in Square Channel

Swapnil Gajanan Chitnis* and Sandeep S Kore

Department of Mechanical Engineering, Vishwakarma Institute of Technology, Pune, India

ABSTRACT: Study has been carried out in a 50mm × 50mm test section to understand the influence of delta winglet vortex generators on heat transfer characteristics in a square channel. Reynolds number based on the hydraulic diameter is varied from 8000 to 20000. With constant heat flux, experiment was performed to calculate heat transfer characteristics by installing pin fins and delta winglet vortex generators on the flat plate. The horizontal pitch of pin fin is varied by 18mm, 20mm and 22mm. Then delta winglets were installed on the finned plate with angle of attack varied from 30°, 45° and 60°. After test setup validation, experiment was conducted and test results were compared with the flat plate results. From experiment it is found that the heat transfers increases by using delta winglet vortex generators. Best results are obtained for Re 20000 with 18mm pin fin pitch having angle of attack of 45°, Enhancement ratio was found to be 3.77 on account of pressure drop across the test section. Thermo Hydraulic performance $(Nu/Nu_0)/(f/f_0)^{1/3}$ were found 2.96. So from the experiment it is concluded that by using delta winglets, heat transfer enhances without severe penalties associated with the pressure drop.

KEYWORDS: Generators, Heat transfer, Pressure

Nomenclature

\dot{m}	: Mass flow rate of air through test duct, kg/s
ΔP	: Pressure drop in test section, N/m ²
ΔT	: Temperature difference, °C
A	: Cross sectional area of air duct, m ²
a_o	: Cross sectional area of orifice, m ²
C_D	: Coefficient of discharge of orifice
C_P	: Specific heat of air, J/kgK
D_h	: Hydraulic diameter of air duct, m
D	: Diameter of pin fins, m
f	: Average friction factor
f_0	: Friction factor of flat plate
S	: Horizontal Displacement of red gage fluid in manometer, m
g	: Gravitational acceleration, m/s ²
h	: Convective heat transfer coefficient, W/m ² K
hm	: Height of liquid column in manometer, m
H	: Height of duct, m

International Journal of Innovative Research in Science, Engineering and Technology

(A High Impact Factor, Monthly, Peer Reviewed Journal)

Visit: www.ijirset.com

Vol. 7, Issue 2, February 2018

k_{air}	: Thermal conductivity of air, W/mK
L	: Length of test plate, m
P	: Pin fin pitch, mm
Q	: Convective heat transfer of air, W
T_{ae}	: Temperature of air at exit, °C
T_{ai}	: Temperature of air at inlet, °C
T_{bm}	: Bulk mean temperature of air, °C
T_s	: Test surface temperature, °C
V	: Average velocity of air, m/s
W	: Width of duct, m

I. INTRODUCTION

The enhancement in the performance of the heat exchangers have attracted many scientist form a long time as they are of great technical, ecological, and not the least, economical importance. The desire for improved heat exchanger performance has led to the various heat transfer augmentation techniques. The aim of these augmentation methods is to reduce the initial and operational cost of the heat exchanger. Initial cost can be reduced if the heat transfer augmentation allows a reduction in heat-exchanger volume or weight. Operating cost can be decreased if the augmentation allows the heat exchanger to meet their function with a lower pressure drop. Heat transfer inside flow passages can be enhanced by using passive surface modifications such as rib tabulators, delta winglet vortex generator, pin fins, protrusions and dimples. These heat transfer augmentation techniques have practical application for, biomedical devices combustion chamber liners and electronics cooling devices, internal cooling of turbine airfoils, food industries and heat exchangers. Recently, delta winglet vortex generators have drawn more attention because it shows significant enhancement in heat transfer with a lower penalty in the increased pressure drop. Force convection heat transfer in smooth and roughed ducts has been investigated by several researchers and large amount of useful data is available in the literature. The use of delta winglet vortex generators has attracted the attention of many scientists because of higher heat transfer rates associated with their use.

Number of researchers studied the passive heat transfer augmentation methods. Amin Ebrahimi et al. [1], evaluate the performance parameters in the laminar flow region with regard to the enhancement of heat transfer using winglet type vortex generators. The Effects of common flow up and common flow down pairs of vortices produced by longitudinal vortex generators with two different shapes of the winglets, a pair of rectangular winglet (RWP) and a pair of delta winglet (DWP), are studied at different Reynolds numbers. The common flow down configuration of delta winglet shows a better overall performance at Reynolds numbers lesser than 720 and common flow up configuration of delta winglet shows a better performance at Reynolds numbers greater than 720. MC Gentry et al. [2], experimentally developed and verified the flow visualization in case of heat transfer enhancement using delta winglet vortex generators. From the experiment it was found that Vortex strength and vortex location relative to the boundary layer play very important roles in the heat transfer enhancement due to a vortex generator [3-21]. Similar research works were carried out by SS Kore et al. [10], in his research the effect of Reynolds number and dimple depth on the heat transfer coefficient and friction factor had been studied. The present study is different from the existing investigations because here in this investigation pin fins are used to enhance the heat transfer from a plate along with the delta winglet vortex generators installed in a common flow up configuration. The experiment was performed for Reynolds number ranging from 8000 to 20000 with various angle of attack of delta winglets and pitch values of pin fins.

International Journal of Innovative Research in Science, Engineering and Technology

(A High Impact Factor, Monthly, Peer Reviewed Journal)

Visit: www.ijirset.com

Vol. 7, Issue 2, February 2018

Vortex Generators

One of the most important passive techniques to enhance the heat transfer is the use of vortex generator. Here in this project we have used delta winglet vortex generator. For delta winglet vortex generator, two vortices are produced as the obstructed fluid passes over the wing from both the side edges (Fig.1). The flow separation at the leading edge of the winglet generates a main vortex and the corner vortex is formed by the deformation of near wall vortex lines at the pressure side of the winglet. Sometimes an induced vortex is also observed rotating opposite to the main and corner vortex (Fig.2). The horseshoe vortex is formed at the junction of the tube and fin, and the delta winglets passively generate longitudinal vortices.

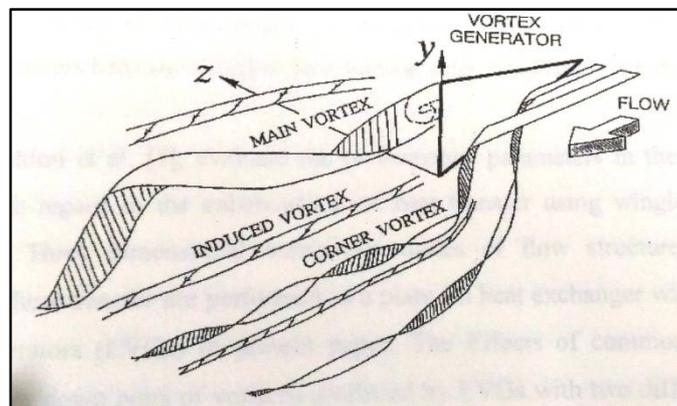


Fig. 1. Vortex system behind a delta winglet [1].

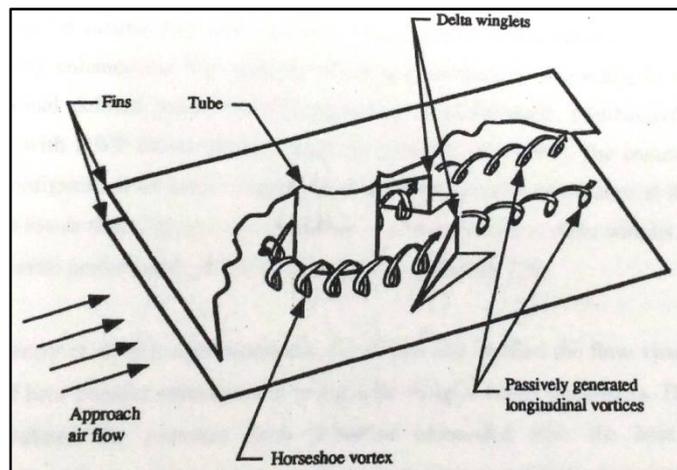


Fig. 2. Horseshoe and longitudinal vortex system [2].

II. EXPERIMENTAL INVESTIGATION

Experimental Setup

The experimental setup for this investigation consist of orifice meter for flow measurement, flow control valve, centrifugal blower, an entrance section, the main test section and then plenum (mixing section) with exit section for the air. The duct is of size 1050mm × 50mm × 50mm and is constructed from epoxy resin material of 10mm thickness. The main test section is of the length 700mm. The entry and exit section length are 250mm and 100mm

International Journal of Innovative Research in Science, Engineering and Technology

(A High Impact Factor, Monthly, Peer Reviewed Journal)

Visit: www.ijirset.com

Vol. 7, Issue 2, February 2018

respectively. The exit section of 100mm is used after the test section in order to reduce the end effects and to get uniform temperature across the duct. A 250mm epoxy resin square section provides hydro-dynamically fully developed flow at the entrance of test section. To provide uniform heat flux, electric heater of size 700mm × 50mm is used. The heater is installed at the bottom side of the test section to provide uniform heating of the test plate. The bottom side of heater is covered with epoxy resin sheet of thickness 10mm and having length 700mm to reduce the heat loss from the bottom side of the heater. The test section is insulated from all sides with ceramic wool having thermal conductivity 0.11 W/mK of thickness 30mm. The mass flow rate of air is calculated by an orifice meter and to control flow of air Gate valve is provided. For temperature measurement calibrated 10 K type Cr/Al thermocouples are used. The pressure drop across the test section is measured by an inclined manometer having red gauge fluid with specific gravity 0.81.

Experimental Procedure

The test section is assembled and checked for air leakages. The blower was switched on so that air can flow through the duct. A constant heat flux is applied to the test surface through electrical heater. The average test surface to bulk mean air temperature difference and the net heat flux was determined over a test section. At each value of flow rate and the related heat flux, the system was allowed to attain a steady state and then only the temperature data were recorded. Once the steady state reached, the pressure drop was measured.

During experiment following parameters were measured:

- i) Pressure difference in the orifice meter.
- ii) Temperature of the test plate and temperatures of air at inlet and outlet of the test section.
- iii) And the Pressure drop across the test section.

Data Reduction

Steady state temperature values of the plate and air in the channel, at various locations for a given heat flux and mass flow rate of air, was used to determine the values of performance parameters (Fig. 3).



Fig. 3. Pin fins with Delta winglet vortex generators

The mass flow rate of air is determined from the pressure drop across the orifice meter, using a following relation:

$$\dot{m} = Cd \times a_0 \times \frac{\rho_{air} \times \sqrt{2gH_a}}{\sqrt{1 - \beta^4}} \quad (1)$$

The useful heat gain of the air is calculated as:

$$Q = m C_p (T_{ae} - T_{ai}) \quad (2)$$

The heat transfer coefficient for the test section is:

$$h = \frac{Q}{A_s \times (T_s - T_{bm})} \quad (3)$$

International Journal of Innovative Research in Science, Engineering and Technology

(A High Impact Factor, Monthly, Peer Reviewed Journal)

Visit: www.ijirset.com

Vol. 7, Issue 2, February 2018

The Nusselt number as,

$$Nu = \frac{h \times D_h}{K_{air}} \quad (4)$$

The friction factor was determined from measured values of pressure drop across the test section using:

$$f = \frac{\Delta P \times D_h}{2 \times \rho_{air} \times L \times V_{air}^2} \quad (5)$$

The thermal and physical properties of air used in the calculation of heat transfer and friction parameter were taken from standard data books which corresponding to mean bulk air temperature of air. The relative humidity of air was found in the range of 20 to 30% and hence the variation due to humidity was neglected during the experimentation and calculations.

III. RESULTS AND DISCUSSION

Validation of Experimental Set Up

The main basic purpose of validity test is to serve as a basis of comparison of results of friction factor and heat transfer from the correlations available in literature review. Before actual experimentation starts, flat plate test experimentation is done. The experimental result of Nusselt number is validated with the Nusselt number obtained from the standard DittusBoelter correlation. The Nusselt number by DittusBoelter equation is given by:

$$Nu = 0.023 Re^{0.8} Pr^{0.4} \quad (104 \leq Re \leq 1.24 \times 10^5) \quad (6)$$

And the friction factor for flat plate is given by modified Blasius correlation as,

$$f_0 = 0.085 Re^{-0.25} \quad (7)$$

The deviation of experimental Nusselt number is in the range of 1.37% to 9.70% for Reynolds number 8000 to 20000. Friction factor is measured by using inclined tube manometer. Inclined tube manometer is used to measure small pressure differences with high accuracy. It is clear that as Reynolds number increases the Friction factor goes on decreasing. The results of actual test shows similarity with the friction factor obtained from the modified Blasius correlation.

Effect of Pin Fins with Delta Winglet Vortex Generators on Nu

The flow structure for channel with delta winglet is analyzed with angle of attack 30°, 45° and 60° for different pin fin pitch values of 18mm, 20mm and 22mm. The incoming fluid strikes the delta winglets and flowing through the both edges of the winglet. It creates the secondary vortices in the channel. These vortices enhance the heat transfer rates. It is clear that the value of Nusselt number and hence the net rate of heat transfer increases as the Reynolds number of flow increases. It is because when Reynolds number of flow increase, the turbulence in the flow increases and hence more number of fluid particles comes in contact with the plate surface for exchanging the heat. Nusselt number decreases as the pitch between the pin fins increases. The reason behind this decrement in the heat transfer is the number of pin fins available for heat transfer. In case of 18mm pitch, there are 39 numbers of pin fins that can be installed on the flat plate of 700mm length. Now in case of 20mm pitch value, there are 35 numbers of pin fins that can be installed on the plate. That means there are 4 less number of pin fins than with the 18mm pitch. So, as the number of pin fins decreases the Nusselt number also decreases due to reduced net effective surface area of heat transfer.

It is clear from experiment that the heat transfer is maximum at an angle of attack of 45°. For 30° and 60° the heat transfers rates are lower as compared to the heat transfer rates obtain at angle of attack 45°. If we compare the results of

International Journal of Innovative Research in Science, Engineering and Technology

(A High Impact Factor, Monthly, Peer Reviewed Journal)

Visit: www.ijirset.com

Vol. 7, Issue 2, February 2018

heat augmentation with respect to the angle of attack of the delta winglets then it can be seen that the Nusselt number increases as the angle of attack increases from 30° to 45° in all 3 cases. It is because when the angle of attack increases the strength of vortex generators also increases.

That's why we are getting increased rates of heat transfer from 30° to 45°. Now from 45° to 60° winglet angles, the Nusselt number shows some decrement. The reason behind this decrement is the orientation and the geometry of the delta winglets at 60° angle of attack. In case of 30° and 45° angle of attack, the primary flow is directed towards the pin fin hence more turbulence is created in the channel. When we are using angle of attack 60° for the delta winglets, the main primary flow is diverted away from the pin fins. Hence here less amount of turbulence is there as compared to other two cases. Hence the rate of heat transfer decreases in this case.

Effect of Pin Fins with Delta Winglet Vortex Generators on Nu/Nu₀

The ratio of heat transfer on plate surface having pin fins and delta winglet vortex generators to the flat plate has been introduced as heat transfer enhancement ratio (Nu /Nu₀). It is seen that 45° angle of attack of delta winglet vortex generators shows increasing trend for increased Reynolds number. Enhancement ratio for 30° angle of attack is in the range of 2.33 to 3.26, for 45° angle of attack is in the range of 2.59 to 3.77 and for 60° angle of attack is in the range of 2.29 to 3.04. So it is clear that the heat transfer enhancement is more in case of 45° of angle of attack.

Effect of Pin Fins with Delta Winglet Vortex Generators on f/f₀

Nusselt number and friction factor depends up on both flow and geometrical parameters of the test surface. It is also observed that as number of pin fins reduces with increase in pitch, friction factor goes on reducing. Maximum value of friction factor (0.0203) is found at Reynolds number 8000 with P = 18mm and α = 60°. The increased amount of fluid flow shows increasing nature of the friction factor. For all arrangements of the pin fin and delta winglet vortex generators the friction factor increases with increase in the Reynolds number of the flow.

Effect of Pin Fins and Delta Winglets on Thermo Hydraulic Performance

Thermal performance for the internal flow over pin fins and winglet geometry gets improved as the flow rate is increased. At higher Reynolds number, thermal performance is also more, this is due to more expenditure required to propel air through the duct. It is seen that in comparison with flat plate, Pin fin with delta winglets having pin fin pitch 18mm and angle of attack 45° is giving the best thermo hydraulic performance of 2.96 for the studied range of Reynolds Number (Figs. 4-6).

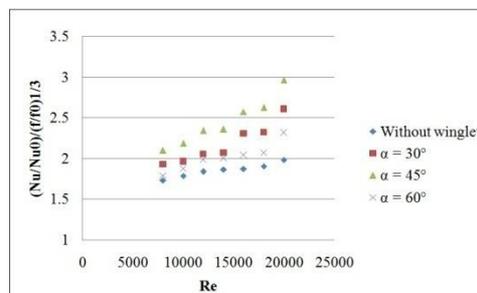


Fig. 4. Thermal performance vs Re for P 18mm.

International Journal of Innovative Research in Science, Engineering and Technology

(A High Impact Factor, Monthly, Peer Reviewed Journal)

Visit: www.ijirset.com

Vol. 7, Issue 2, February 2018

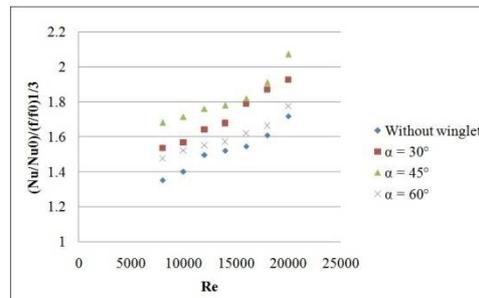


Fig. 5. Thermal performance vs Re for P 20mm.

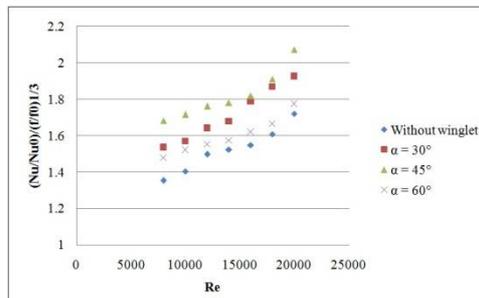


Fig. 6. Thermal performance vs. Re for P 22mm.

IV. CONCLUSION

An experimental study of the flow of air in a square channel with pin fins and delta winglet vortex generators, subjected to uniformity of heat flux boundary condition has been performed. Investigation have been done in two stages first with installation of only pin fins with different horizontal pitch (18mm, 20mm and 22mm) and then delta winglets were installed on the plate in various angle of attacks (30°, 45° and 60°). Following conclusion have been drawn from the test results:

1. From the experiment it is concluded that with decreasing the horizontal pitch of Pin fin the heat transfer rates increases.
2. Friction factor reduces with increase in Reynolds number. This is due to suppression of secondary vortices at higher flow rates.
3. In case of delta winglet vortex generators, the heat transfer enhances but on the account of increases in the pressure drop. For Pin fin of 18mm pitch the friction factor ratio varies from 1.67 to 2.25.
4. It is observe that the heat transfer augmentation is maximum for 18mm pin fin pitch with 45° angle of attack of delta winglet vortex generators. The maximum value of enhancement ratio is 3.77 with friction factor ratio of 2.06.

From the experiment it is found that the heat transfer rates and the pressure drop across the test section depends upon both geometry of the extended surfaces and the orientation of the delta winglet vortex generators.

REFERENCES

- [1] E. Amin, K. Saeid, "Numerical simulation of performance augmentation in a plate fin heat exchanger using winglet type vortex generators", International Journal of Mechanical Engineering and Mechatronics, Vol. 1 no. 1, pp 1-30, 2014.
- [2] MC.Gentry, AM. Jacobi, "Thesis on "Heat Transfer Enhancement on a Flat Plate Using Delta-Wing Vortex Generators", Air Conditioning & Refrigeration Center", University of Illinois, Urbana, 1995.

International Journal of Innovative Research in Science, Engineering and Technology

(A High Impact Factor, Monthly, Peer Reviewed Journal)

Visit: www.ijirset.com

Vol. 7, Issue 2, February 2018

- [3] F.Durst, N.Sahiti, A. Dewan, "Heat transfer enhancement by pin elements", International Journal of Heat and Mass Transfer, Vol.48, pp 4738-4747, 2005.
- [4] Y.Pardeep, P. Kumar, B. Singh, "Study of flow & heat transfer in plate fin heat exchanger at varying Reynolds's no", Proceedings of the National Conference on Trends and Advances in Mechanical Engineering, YMCA University of Science & Technology, Faridabad, Haryana, pp. 100-105, 2012.
- [5] AM. Jacobi, MC. Gentry, "Heat Transfer Enhancement by Delta-Wing Vortex Generators on a Flat Plate: Vortex Interactions with the Boundary Layer", Experimental Thermal and Fluid Science, vol. 14, pp. 231-242, 1997.
- [6] K.Russi, D. Sunil, S.Gurjeet, "CFD Simulation of Heat Transfer Enhancement by Plain and Curved Winglet Type Vortex Generators with Punched Holes", International Journal of Engineering Research and General Science, Vol. 2no. 4, pp. 648-659, 2014.
- [7] A.Akcaoyoglu, C. Ozgun, C. Nazli, F.Yilmaz, A.Pinarbasi, "Optimum distance between vortex generators used in modern thermal systems", European Scientific Journal, pp. 131-138, 2014.
- [8] JE.O'Brien, MS.Sohal, TD. Foust, PC. Wallstedt, "Heat transfer enhancement for finned-tube heat exchangers with vortex generators: experimental and numerical results", INEEL 12th International Heat Transfer Conference, pp. 1-7, 2002.
- [9] CB.Allison, BB. Dally, "Effect of a Delta-Winglet vortex pair on the performance of a tube-fin heat exchanger", School of Mechanical Engineering University of Adelaide, SA 5005, Australia, 2006.
- [10] SS.Kore, SV. Joshi, NK. Sane, "Experimental investigations of heat transfer enhancement from dimpled surface in a channel", International Journal of Engineering Science and Technology, pp. 6227-6234, 2011.
- [11] JY Jang, Ying-Chi Tsai, "Optimum louver angle design for a louvered fin heat exchanger", International Journal of the Physical Sciences, Vol. 6 no.28, pp. 6422-6438, 2011.
- [12] G.Sachdeva, KS. Kasana, R.Vasudevan, "Heat Transfer Enhancement and Flow Losses in a Plate- Triangular Fin Heat Exchanger with Longitudinal Vortex Generators: A Comparison of Rectangular and Delta Wing", the 37th National & 4th International Conference on Fluid Mechanics and Fluid power, pp. 1-10, 2010.
- [13] A. Amit, NP. Gulhane, "CFD analysis of fin tube heat exchanger using rectangular winglet vortex generator", International Journal of Emerging Technologies in Computational and Applied Sciences (IJETCAS), pp. 450-457, 2014.
- [14] AD.Sommers, AM. Jacobi, "Air-side heat transfer enhancement of a refrigerator evaporator using vortex generation", International Journal of Refrigeration 28, pp. 1006-1017, 2005.
- [15] AM.Jacobi, A.Joardar, "Impact of leading edge delta-wing vortex generators on the thermal performance of a flat tube, louvered-fin compact heat exchanger", International Journal of Heat and Mass Transfer, vol.48, pp. 1483-1493, 2004.
- [16] H.Huisseune, C.T'Joen, JP. De, B.Ameel, PM. De, " Numerical study of a round tube heat exchanger with louvered fins and delta winglets", Ghent University, Department of Flow, Heat and Combustion Mechanics, Belgium, 2012
- [17] RB. Pérez, JI.Yanagihara, JGG Bayón, "Heat transfer enhancement of a plate finned elliptical tube using vortex generators: an experimental study", Department of Mechanical Engineering Polytechnic School - University of São Paulo SP, Brazil, 2000.
- [18] HS. Kulkarni, SS. Kore, "Experimental Investigation of Heat Transfer Enhancement by Longitudinal Rectangular Vortex Generator", International Journal of Innovative Research in Advanced Engineering, pp. 74-81, 2014.
- [19] S. Eiamsaard, K. Wongcharee, P. Eiamsaard, C. Thianpong, "Heat transfer enhancement in a tube using delta-winglet twisted tape inserts", Applied Thermal Engineering, Vol. 30, pp. 310-318, 2009.
- [20] JY. Jang, LF. Hsu, JS.Leu, "Optimization of the span angle and location of vortex generators in a plate-fin and tube heat exchanger", International Journal of Heat and Mass Transfer vol. 67, pp. 432-444, 2013.
- [21] SP.Sukhatme, "Heat Transfer", Universities Press, 4th edition, 2005.