



Performance Enhancement of Digital Image Deblurring Using Hybrid Approach

Karandeep Kaur¹, Meena Malik²

M.Tech Student, Dept. of Electronics and Communication Engineering, RBIEBT, Sahauran, Kharar, India¹

Assistant Professor, Dept. of Electronics and Communication Engineering, RBIEBT, Sahauran, Kharar, India²

ABSTRACT: Motion blur can significantly degrade the quality of an image. The images become blurred due to camera movements, object movements or displacements of pixels. Deblurring of an image is done by processing an image through curvelet transform and removal of noise by median filter. Experimental results show that proposed deblurring technique and accuracy measurement using peak signal to noise ratio, root mean square error and mean square error. Curvelet transformation is a multi-scale transformation technique which is most suitable for the objects with curves. Curvelet are a non-adaptive technique for multi scale object representation.

KEYWORDS: blur, point spread function, Median filter, curvelet transform, MSE, RMSE and PSNR.

I. INTRODUCTION

MOTION blur is the result of the relative motion between the camera and the scene during the integration time of the image. It has also been used to obtain motion and scene 3D structure information. Motion blur has also been used in computer graphics to create more realistic images which are pleasing to the eye. Several representations and models for motion blur in human and machine vision have been proposed. Very often, motion blur is simply an undesired effect. It has plagued photography since its early days and is still considered to be an effect that can significantly degrade image quality. Every motion blurred image tends to be uniquely blurred. This makes the problem of motion deblurring hard[1].When a photograph is taken of a fast moving object, motion blur can cause significant degradation of the image .This is caused by the movement of the object relative to the sensor in the camera during the time the shutter is open. Both the object moving and camera shake contribute to this blurring. Image deblurring is usually the first process that is used in the analysis of digital images. In any image denoising technique it is very important that the denoising process should not have any blurring effect on the image, and makes no changes on the preserving of images to image edges [2].

Digital images have applications in daily life, such as digital cameras, HDTV (High Definition Television) and in areas of research and technology including GIS(Geo-graphical Information System). Datasets collected by image sensors are generally contaminated by noise and noise can be introduced by transmission errors and compression. The purpose of image denoising is to recover an image that is cleaner than its noisy observation. Thus, noise reduction is an important technology in image analysis and the first step to be taken before images are analysed[3].The restoration image is very important process in the image processing to restore the image by using the image processing techniques to easily understand this image without any artifacts errors[4].

Digital image acquisition and processing techniques plays very important role in current-day digital images. Digital images are generally of low contrast and they often have a complex type of noise due to various acquisitions, transmission storage and display devices and also because of application of different types of quantization, reconstruction and enhancement algorithms.

Digital images are contaminated with Gaussian noise and blur which are some of the major sources of image quality degradation. Image restoration is the removal or reduction of degradations that are incurred while the image is being obtained. Degradation comes from blurring as well as noise due to electronic and photometric sources. A noise is introduced in the transmission medium due to a noisy channel, errors during the measurement process and during



International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 3, Issue 4, April 2015

quantization of the data for digital storage. Image denoising finds applications in medical imaging where the physical requirements for high quality imaging are needed for analysing images of unique events. Gaussian noise significantly degrades the image quality and hence, makes it more difficult for the observer to discriminate fine detail of the images in diagnostic examinations. The standard model of amplifier noise is additive, Gaussian, independent at each pixel and independent of the signal intensity. Additive white Gaussian noise is a channel model in which the only impairment to communication is a linear addition of wideband or white noise with a constant spectral density and a Gaussian distribution of amplitude. Blurring limits visibility of detail. There is some blurring in all digital images. There are three specific effects of blurring in digital imaging reduced visibility of detail, image unsharpness and reduced spatial resolution. Deblurring plays an important role in signal processing. An image is often corrupted by noise in its acquisition or transmission. The aim of deblurring is to remove the noise and blur from the corrupted image and retain as much as possible the important information. Curvelet transform is a multiscale geometric wavelet transforms, can represent edges and curve-singularities much more efficiently than traditional wavelet. Curvelet combines multiscale analysis & geometrical ideas to achieve the optimal rate of convergence by simple thresholding. In soft thresholding scheme, if the absolute value of the input X is less than or equal to λ then the output is forced to zero. In the hard thresholding scheme, the input is kept if it is greater than the threshold λ , otherwise it is zero. The hard thresholding procedure removes the noise by thresholding only the wavelet coefficients of the detailed sub band, while keeping the low-resolution coefficients unaltered. Median filter follows the moving window principle and uses 3×3 , 5×5 or 7×7 window. The median of window is calculated and the center pixel value of the window is replaced with that value. This paper presents the image de-blurring and de-noising on digital images embedded in Gaussian noise and motion blur based on curvelet transformation using median filter. The performance assessment parameters used are Peak-signal-to-noise-ratio (PSNR) and Mean square error (MSE) [5]. The assumption of Gaussian noise is a fundamental element of common image deblurring algorithms [6].

A) Blurring

Blur is unsharp image area caused by camera or subject movement, inaccurate focusing, or the use of an aperture that gives shallow depth of field. The Blur effects are filters that smooth transitions and decrease contrast by averaging the pixels next to hard edges of defined lines and areas where there are significant color transition.

B) Blurring Types

In digital image there are 3 common types of Blur effects:

i) Average Blur

The Average blur is one of several tools you can use to remove noise and specks in an image. Use it when noise is present over the entire image. This type of blurring can be distribution in horizontal and vertical direction and can be circular averaging by radius R which is evaluated by the formula:

$$R = \sqrt{g^2 + f^2}$$

Where: g is the horizontal size blurring direction and f is vertical blurring size direction and R is the radius size of the circular average blurring.

ii) Gaussian Blur

The Gaussian Blur effect is a filter that blends a specific number of pixels incrementally, following a bell-shaped curve. The blurring is dense in the centre and feathers at the edge. Apply Gaussian Blur to an image when you want more control over the Blur effect.

iii) Motion Blur

The Motion Blur effect is a filter that makes the image appear to be moving by adding a blur in a specific direction. The motion can be controlled by angle or direction (0 to 360 degrees or -90 to $+90$) and/or by distance or intensity in pixels (0 to 999), based on the software used.

II. DEBLURRING

A) Deblurring Model

A blurred or degraded image can be approximately described by this equation:

$$g = \text{PSF} * f + N,$$

Where: g the blurred image, h the distortion operator called Point Spread Function (PSF), f the original true image and N Additive noise, introduced during image acquisition that corrupts the image.



International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 3, Issue 4, April 2015

1) Point Spread Function (PSF)

Point Spread Function (PSF) is the degree to which an optical system blurs (spreads) a point of light. The PSF is the inverse Fourier transform of Optical Transfer Function (OTF). In the frequency domain, the OTF describes the response of a linear, position-invariant system to an impulse. OTF is the Fourier transfer of the point (PSF).

III. DEBLURRING TECHNIQUES

A) Median filter-

A median filter belongs to the class of nonlinear filters unlike the mean filter. The median filter also follows the moving window principle similar to the mean filter. A 3×3 , 5×5 , or 7×7 kernel of pixels is scanned over pixel matrix of the entire image. The median of the pixel values in the window is computed, and the centre pixel of the window is replaced with the computed median. Median filtering is done by first sorting all the pixel values from the surrounding neighbourhood into numerical order and then replacing the pixel being considered with the middle pixel value.

123	125	126	130	140
122	124	126	127	135
118	120	150	125	134
119	115	119	123	133
111	116	110	120	130

Neighbourhood values:

115,119,120,123,124,125,126,127,150

Median value: 124

B) Curvelet -

The Curvelet transform is a higher dimensional generalization of the Wavelet transform designed to represent images at different scales and different angles.

Curvelet have unique mathematical properties:-

- 1) Curved singularities can be well approximated with very few coefficients and in a non-adaptive manner.
- 2) Curvelet remains coherent waveforms under the action of the wave equation in a smooth medium. Curvelets are a non-adaptive technique for multi-scale object representation. Being an extension of the wavelet concept, they are becoming popular in similar fields, namely in image processing and scientific computing.

Curvelets are appropriate basis for representing images (or other functions) which are smooth apart from singularities along smooth curves, where the curves have bounded curvature, i.e. where objects in the image have a minimum length scale. This property holds for cartoons, geometrical diagrams, and text. As one zooms in on such images, the edges they contain appear increasingly straight. Curvelets take advantage of this property, by defining the higher resolution curvelets to be skinnier the lower resolution curvelets. However, natural images like photographs do not have this property; they have detail at every scale [3].

IV. METHEDODOLOGY

Curvelet transform is a non-adaptive technique for multiscale object representation. First, we used wavelet transform methods, which would decompose signal into a series of different sub bands, then using local ridgelet transform for each subband signal. And the size of sub-block in local ridge wave would vary due to scale change. The Curvelet decomposition of function $f(x, y)$ includes the. Shown in Figure (1)

International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 3, Issue 4, April 2015

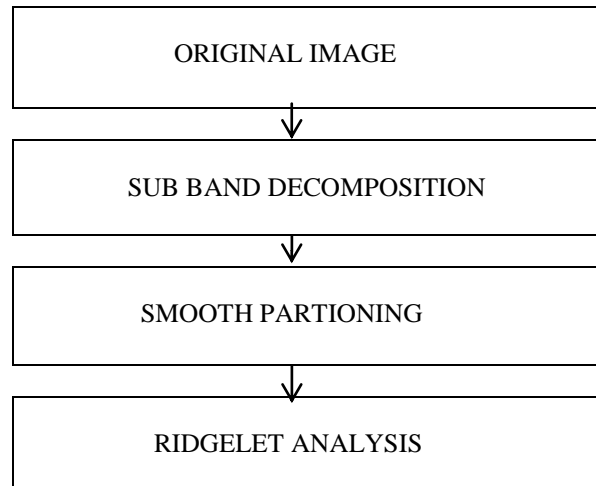


Figure 1: Steps in Curvelet Transform

Steps in Curvelet Transform: The Curvelet decomposition of function $f(x, y)$ includes the following steps:-

1) Sub-Band Decomposition. Through wavelet transform the signal was decomposed into multiple sub-band components or layers.

Each layer contains details of different frequencies:

- a) P_0 – Low-pass filter.
- b) $\Delta_1, \Delta_2, \dots$ – Band-pass (high-pass) filters.

The original image can be reconstructed from the sub-bands:

P_0 is “smooth” (low-pass), and can be efficiently represented using wavelet Base.

The discontinuity curves effect the high-pass layers $\Delta_s f$.

Can they be represented Can they be represented efficiently?

- (i) Looking at a small fragment of the curve, it appears as a relatively straight ridge.
- (ii) We will dissect the layer into small partitions.

2) Smooth partitioning. In this step, the high frequency band will be divided into several sub blocks, and different sub band components can be divided into different sub-block size.

3) Ridgelet Decomposition. The Ridgelet transform was used to each sub-block which was from smoothing & segmenting sub-band [3].

V. PERFORMANCE CALCULATION

A. PEAK SIGNAL TO NOISE RATIO

One of the common reliable methods to measure the accuracy in the image processing field is the (PSNR), the peak signal to noise ratio for a grayscale image can compute using the following equation:

$$PSNR = 20 * \text{Log}_{10} \left(\frac{255}{\sqrt{MSE}} \right)$$

Where MSE can be calculated using the following equation:

International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 3, Issue 4, April 2015

$$MSE = \frac{1}{M*N} \sum_{x=1}^M \sum_{y=1}^N f(x,y) - \hat{f}(x,y)$$

Where, (M, N) are the dimensions of the image, $f(x, y)$ is the original image, $f'(x, y)$ is the restored image. The higher PSNR value means the image has a better quality in the deblurred image. This metric helps to deliver an unbiased standard to compare diverse techniques.


VI. RESULTS AND DISCUSSIONS

In our work, the algorithm described in above section such as Curvelet transform and well known method such as, Median filter have been applied on standard images. The results were evaluated both qualitatively and quantitatively. Curvelet transform is applied to MRI images then it is applied to geological and satellite images to calculate MSE, RMSE and PSNR as shown in Fig. 1 which contains Original images respectively.

Original images



(a) CCTV footage image

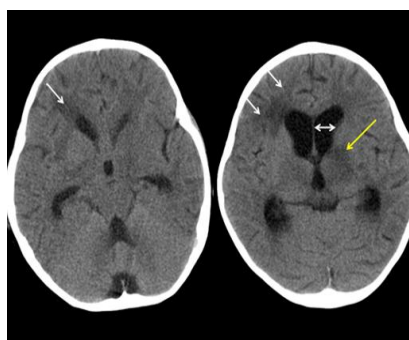

(b) Medical image



(c) geological image



(d) satellite image

Fig. 2 Original image (a) CCTV footage image (b) Medical image (c) Geological image (d) Satellite image

International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 3, Issue 4, April 2015

TABLE 1.

Sr no.	Images	MSE	RMSE	PSNR
1.	CCTV footage image	3.94	1.99	42.17
2.	Medical image	2.65	1.63	43.90
3.	Geological image	3.48	1.87	42.71
4.	Satellite image	1.72	1.31	45.78

Table 1. Results of MSE, RMSE and PSNR for curvelet-median filter

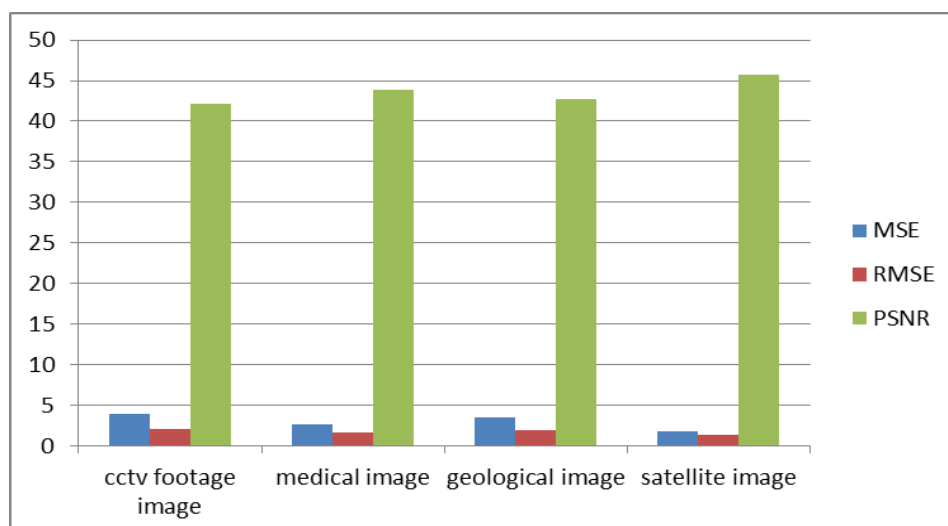


Fig 3. Bar graph for curvelet-median filter

VII. CONCLUSIONS

In our work, we make use of curvelet for deblurring of grayscale images. For the image deblurring, the curvelet transform using fast Fourier transform is more prevailing method than the other methods. Curvelet transform and well known method such as median filter has been applied on CCTV footage image, medical image geological and satellite images. Image deblurring method has been executed which is trouble-free and skilled system build on curvelet uses PSNR, MSE and RMSE quality metrics to improve the quality of an image. However, the output from Curvelet method is much closer to the high quality image and there is no blurring in the output image. Curvelet method is more efficient in deblurring for digital images due to the ability of curvelet to recover signals in different directions as compared with the previous work done using other methods. The work, up to the current stage has shown how Curvelet transform can be implemented to scale and translate motion blur and Gaussian noise images into a multi-resolution analysis representation. The results obtained have shown significant motion blur and Gaussian noise reduction but the images tend to smear with more decomposition levels. Hence, there are still areas that can be done to improve this work. The threshold procedures can be used in the algorithm to further improve noise and blur from an image.

REFERENCES

[1] Moshe Ben-Ezra and Shree K. Nayar, 'Motion-Based Motion Deblurring', IEEE TRANSACTIONS ON PATTERN ANALYSIS AND MACHINE INTELLIGENCE, VOL. 26, NO. 6, JUNE 2004, 689- 698.



ISSN(Online): 2320-9801
ISSN (Print): 2320-9798

International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 3, Issue 4, April 2015

- [2] Deveneder Sharma, Puneet Sharma, Ritu Sharma, 'Comparative Analysis of Various Techniques for Non-Blind Restoration of Images', International Journal of Advanced Research in Computer and Communication Engineering Vol. 2, Issue 8, August 2013.
- [3] Kanika Sharma and Kiran Jyoti, 'Image Denoising Based on Curvelet Transforms and its Comparative Study with Basic Filters', Journal of Computer Science and Applications. ISSN 2231-1270 Volume 5, Number 1 (2013), pp. 31-37.
- [4] Mr Salem Saleh Al-amri1, Dr. N.V. Kalyankar A Comparative Study for Deblurred Average Blurred Images International Journal on Computer Science and Engineering'. Vol. 02, No. 03, 2010, 731-733.
- [5] Mnupreet Kaur1, Balwinder Singh, 'Performance Enhancement of Blurred and Noisy Medical Images using Curvelet Transformation', International journals of computer science and communication engineering IJCSCE ,special issue on "Emerging trends in engineering and management", ICETE 2013, ISSN 2019-7083.
- [6] Leah Bar1, Nir Sochen2, and Nahum Kiryati, 'Image Deblurring in the Presence of Salt-and-Pepper Noise'. MUSCLE: Multimedia Understanding through Semantics, Computation and Learning, a European Network of Excellence funded by the EC 6th Framework IST Programme.

BIOGRAPHY

Karandeep kaur is the M.tech student of the department of electronics and communication engineering in rayat and bahara institute of engineering and bio-technology, sahaaran, kharar, India.

Meenu Malik is the assistant professor of the department of electronics and communication engineering in rayat and bahara institute of engineering and boi-technology, sahaaran, kharar, India.