



International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 3, Issue 12, December 2015

A Secure DHCP Protocol to Mitigate LAN Attacks

Osama S. Younes

Faculty of Computers and Information Technology, Tabouk University, USA

ABSTRACT: Network security has become more of a concern with the rapid growth and expansion of the Internet. While there are several ways to provide security in the application, transport, or network layers of a network; the data link layer (Layer 2) security has not yet been adequately addressed. Data link layer protocols used in local area networks (LANs) are not designed with security features. Dynamic host configuration protocol (DHCP) is one of the most used network protocols for host configuration that works in data link layer. DHCP is vulnerable to a number of attacks, such as the DHCP rouge server attack, DHCP starvation attack, and malicious DHCP client attack. This work introduces a new scheme called Secure DHCP (S-DHCP) to secure DHCP protocol. The proposed solution consists of two techniques. The first is the authentication and key management technique that is used for entities authentication and management of security key. It is based on using Diffie-Hellman key exchange algorithm supported by the difficulty of Elliptic Curve Discrete Logarithm Problem (ECDLP) and a strong cryptographic one-way hash function. The second techniques is the message authentication technique, which uses the digital signature to authenticate the DHCP messages exchanged between the clients and server.

KEYWORDS: DHCP Protocol, DHCP-configured device, EAKM Technique.

I.INTRODUCTION

Evolving of computer networks, and the variety of its services and applications, has increased the users need for local area networks (LANs) [1]. LAN technologies, such as Ethernet, are the infrastructure for the Internet that everybody uses without further thought.

Ethernet stands as the dominant networking technology in Local Area Network (LAN), which has been widely used in campus networks, enterprise networks and data centre networks due to its simplicity and auto-configuration characteristics. Its ease of use and low cost rely on broadcast-based service or resource discovery protocols, such as Dynamic Host Configuration Protocol (DHCP), Address Resolution Protocol, Network Time Protocol, and Network Basic Input/Output System.

Network security has become more of a concern with the rapid growth and expansion of the Internet. While there are several ways to provide security in the application, transport, or network layers of a network; the data link layer (Layer 2) security has not yet been adequately addressed [2]. In local networks, security weaknesses in the data link layer enable internal attacks. Although switches and routers have some built-in security features, they are not enough to fully ensure the security of LANs. Moreover, these features require network administrators' involvement and are prone to misconfiguration. In addition, data link layer protocols used in local area networks (LANs) are not designed with security features [2].

DHCP simplifies the access to a network. When a host connects to the network, DHCP [3] automates the assignment of TCP/IP stack configuration parameters such as IP addresses, subnet masks, and default gateway. It is an internet protocol that lets network administrators centrally manage the network. Without using DHCP, the IP address must be manually assigned for each host in a network and if the host moved to a new location in the network, the IP address must be manually configures.

DHCP is one of the most used network protocols for host configuration. It was designed since a long time ago [4-6] and it had not major changes, although it is vulnerable to a number of attacks, such as the DHCP rouge server attack, DHCP

International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 3, Issue 12, December 2015

starvation attack, and malicious DHCP client attack. The main source of these attacks is given by the fact that DHCP does not use any authentication scheme for clients, servers, or exchanged messages.

Much research [7-17] has been done to make DHCP protocol more secure. Most of this research is based on the work introduced in [7], which proposed a standard for DHCP message authentication using the option field in the DHCP message based on a shared secret key between client and server. The main drawback of the work introduced is that they did not show how the secret key is managed between the servers and clients. In addition, some of this research use a digital certificate to sign the exchanged message between the client and server; however, the size of the digital certificate exceeds the DHCP message and cannot be loaded into it. Few schemes [15-16] introduced for key management between clients and server. However, these schemes does not scale up with number of clients and make a central point of failure.

In this work, a new scheme called S-DHCP (Secure DHCP) is proposed to secure DHCP protocol. S-DHCP is an authentication technique, based on an extension of the DHCP protocol, which is used to mutually authenticate the DHCP client and DHCP server as well as to protect the integrity of the DHCP messages. The proposed solution is based on two techniques; entity authentication and key management (EAKM) technique, and message authentication (MA) techniques. EAKM technique is based on using Diffie-Hellman key exchange algorithm supported by the difficulty of Elliptic Curve Discrete Logarithm Problem (ECDLP) and a strong cryptographic one-way hash function. It is used to mutually authenticate the client and the DHCP server, exchange the session key, and generate a digital signature for each client and DHCP server. The MA technique uses the digital signatures generated using the EAKM technique to authenticate the DHCP messages exchanged between the client and server.

The paper is organized as follows. Section 2 describes the functions of the DHCP protocol. DHCP security issues are discussed in Section 3. Related work is discussed in section 4. The entity authentication technique is described in Section 5. Then, Section 6 shows how Message authentication technique uses a digital signature to authenticate the DHCP messages. After that, Section 7 analyses the security problems of DHCP according to the proposed solution. Finally, section analyses the performance of the proposed techniques.

II. DYNAMIC HOST CONFIGURATION PROTOCOL

DHCP [3] Stands for Dynamic Host Configuration Protocol. It allows a host to obtain an IP address dynamically when it connects to the network. This service automates the assignment of IP addresses, subnet masks, gateway and other IP networking parameters. DHCP distributed addresses are not permanently assigned to hosts but are only leased for a period of time. If the host is powered down or taken off the network, the address is returned to the range for reuse. This is especially helpful with mobile users that come and go on a network. The operation of the DHCP protocol is shown in Figure 3.

The operation of DHCP protocol is shown in Figure 1. When a DHCP-configured device boots up or connects to the network, the client broadcasts a DHCPDISCOVER packet to identify any available DHCP servers on the network. A DHCP server replies with a DHCPOFFER, which is a lease offer message with an assigned IP address, subnet mask, DNS server, and default gateway information as well as the duration of the lease.

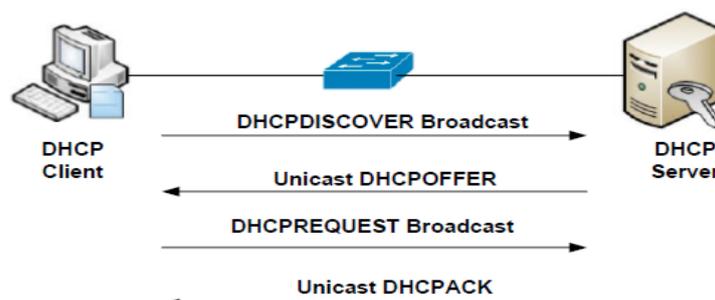


Figure 1: DHCP protocol operations



International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 3, Issue 12, December 2015

The client may receive multiple DHCP OFFER packets if there is more than one DHCP server on the local network, so it must choose between them, and broadcast a DHCP REQUEST packet that identifies the explicit server and lease offer that the client is accepting. A client may choose to request an address that it had previously been allocated by the server. Assuming that the IP address requested by the client or offered by the server is still valid, the server would return a DHCP ACK message that acknowledges to the client the lease finalization.

III. DHCP SECURITY PROBLEMS

3.1. DHCP Exhaustion Attack

The DHCP server has a pool of IP addresses that are leased to hosts; but the IP address pool has always limited number of IP addresses. In DHCP exhaustion attack [2], the attacker exhausts the IP addresses in the DHCP address pool. The DHCP server happily hands out the entire set of addresses available to the client's network, because it has no way to differentiate between genuine host and spoofed one. If a legitimate client tries to obtain an IP address, it will have no IP connectivity because the entire of addresses have been allocated to the spoofed clients.

3.2. DHCP Rogue Server Attack

The rogue server is a DHCP server on a network which is not under the administrative control of the network staff. The DHCP rogue server attack [2] is a famous LAN attack in which a malicious user disguises itself as a DHCP server and responds to DHCP requests with a bogus IP address. When clients connect to the network, both the rogue and legal DHCP receive the DHCP DISCOVER message; then both servers will offer them IP addresses as well as default gateway. The DHCP rogue server responds to DHCP requests with wrong configuration. The wrong information may be wrong default gateway, wrong DNS server, or wrong IP address. When the attacker host (a Rogue DHCP server) make itself a default gateway, it can receive the whole traffic of the network. So, he can analyse and modify all packets sent from the attacked machine and he can steal passwords and privacy information.

3.3. Malicious DHCP Client

Malicious client can gain unauthorized access in a network and then it can use the network services without being allowed to. More, it can launch a DHCP starvation attack, exhausting the DHCP server available IP addresses. An unauthorized client can also install and configure a rogue DHCP server and then realize the attacks specific to an illegitimate DHCP server.

IV. RELATED WORK

The In RFC 3118 [7], two standard techniques were used to use the option field for authentication of DHCP messages; configuration token and delayed authentication. The configuration token scheme is based on sharing a secret token between the client and server. This scheme can only protect DHCP server that has inadvertently been instantiated. It does not support DHCP message authentication. The delayed authentication scheme uses HMAC technique for DHCP message authentication. It uses pre-shared secret key with MD5 message-digest algorithm to generate the MAC for DHCP messages. Although this scheme tried to solve the problem of DHCP entity authentication and message authentication using a shared secret key, it did not show how the secret key is managed especially for a large number of clients. In addition, the security of the MD5 hash function is severely compromised. A collision attack exists that can find collisions in seconds using a desktop computer [8].

Using the option field for DHCP message authentication is limited because its maximum size is 255 bytes (the length field is one byte). To encode options larger than 255 bytes, a technique was introduced in [9]. The authors used sname and file fields to store long options using a technique called aggregate buffer.



International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 3, Issue 12, December 2015

In [10], the method introduced in [7] has been developed for securing DHCP using a digital certificate. The authors used a trusted server to distribute the digital certificates between the clients and server. Because of its size, the digital certificate cannot fit into one DHCP message. Therefore, the authors introduced a scheme depends on fragmentation of the DHCP message into many messages.

Based on authentication option specification introduced in [7], a method based on using X.509 digital certificate was introduced in [11]. The digital certificate is used to sign the DHCP messages transmitted between clients and server. A common trust server or authority is used to distribute the digital certificate. The authors showed that the digital certificate cannot be loaded in one DHCP message because of its large size. In addition, they indicated that the digital certificates revocation policies are hard to set up. Also, the authors recommended that using certificate based authentication with delay authentication.

Two methods were proposed in [12] to make DHCP more secure; Secure DHCP with Digital Certificates (SDDC) and Secure DHCP with Shared Secrets (SDSS). The SDDC method depends on using digital certificates to authenticate the DHCP messages and entities. However, this method did not take into account the size of digital certificate may exceed the size of the DHCP message. The SDSS method uses a secret key shared between entities to authenticate the DHCP messages.

Another mechanism called Challenge Handshake Authentication Protocol (CHAP) was introduced in [13] for authenticating the entities using DHCP. This mechanism lets the server generates an encrypted challenge response and attach it to the DHCPDISCOVER message when it receives the DHCPDISCOVER message. The challenge response is computed using a hash function and a secret key that must be shared between the DHCP clients and server. Also, Other DHCP messages; DHCPREQUEST and DHCPACK, are attached with the challenge response to authenticate the messages and entities. Although, this work did not change the state machine of the client, it introduced a new server; called authentication server, with additional communication between it and the DHCP server. In addition, the authors did not show how the secret key is managed between the servers and clients.

In [14], a method for authentication of clients and DHCP message was proposed based on Kerberos V [15]. The proposed method used the authentication option specification defined in [7]. Kerberos V protocol uses an authentication server and key distribution centre, which issues tickets for the clients and server that are encrypted using secret keys shared between the clients and server. To authenticate the DHCP request and response, the ticket of the client or server is included in the DHCP message. The main disadvantages of this method is that the Kerberos server represents a single point of failure. In addition, the tickets uses the timestamp to prevent replay attack, which means that the clock of clients and servers should be synchronized.

To provide mutual authentication for DHCP clients and server and for DHCP message authentication, a scheme was proposed in [16]. This scheme is similar to schemes introduced in [7, 9, 10]. However, this scheme presented a methodology for sharing secret keys between entities, which is used to compute MAC (Message Authentication Code) for DHCP messages. The scheme suppose that there is a shared secret key between entities, which is used to generate a secret key for each DHCP message using a generated random number. Unfortunately, the authors did not show how the random number is generated and how the new secret key is generated from the old secret key and the random number.

V. ENTITY AUTHENTICATION AND KEY MANAGEMENT TECHNIQUE (EAKM)

This section explains the proposed authentication and key management scheme. It is based on Diffie-Hellman key exchange algorithm supported by the difficulty of Elliptic Curve Discrete Logarithm Problem (ECDLP) and based on using a strong cryptographic one-way hash function. The significant advantage of ECDLP is the faster calculations compared to other public key cryptosystems with the same security levels. The EAKM technique is inspired by the work introduced in [18]. Table 1 shows all notations used for the proposed scheme. The overall scheme is illustrated in Figure 2 and are explained as follows. The proposed scheme consist of three phases: the setup phase, the registration phase, and the authentication phase.



International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 3, Issue 12, December 2015

5.1. Setup Phase:

In this phase, the clients and server agree on the used elliptic curve parameters. The server chooses a secret key K_S , then it selects a point P in the elliptic curve to compute the public key $Q = K_S \cdot P$. The server publishes all parameters; P , a , b , n , h , and Q , excepts the secret key K_S .

5.2. Registration Phase:

As shown in Figure 2, the registration phase consists of two steps:

- The user or the network administrator chooses the identity C and password PW_C for the client. Then, C , PW_C , and MAC address of the client are sent to the server over a secure channel, such as a VPN (Virtual Private Network) or SSL (Secure Sockets Layer), or the network administrator insert them manually to the server database.
- The server computes the password verification code $V_f = h(C \| K_S) \oplus PW_C$ using a strong cryptographic hash function $h(\cdot)$ and the server password K_S ; then it stores the binding (C, MAC) in its database.

5.3. Authentication Phase:

When any client C tries to connect to the local area network managed by the authentication server S , the authentication procedure between C and S proceeds as shown in Figure 2, which is illustrated as follows:

Step 1: The client generates the random number r_1 , and then it computes the parameter $M = r_1 \cdot P + (C \| PW_C)$ using the parameters P and H published by the server. The parameter M , the client ID (C), and the client MAC address are sent to the server in the request message REQUEST (C, MAC, M).

Step 2: If the server received the request message, it checks that the client identifier C and the client MAC address are stored in its database. If the server does not find C and MAC , it ignores the request message. Otherwise, the server generates a random number r_2 and use the password verification code V_f bended with C and stored in the database, and the sent parameter M to compute the client password PW_C and parameter N, M_1' and R_2 , which are used to compute the parameter h_1 , as shown in Figure 2. After calculating the parameter R_2 and h_1 , the server sends them with its identity S in a challenge message CHALLENGE (S, R_2, h_1).

Step 3: After receiving the challenge message, the client compute the value of $M_1 = r_1 \cdot Q = r_1 \cdot K_S \times P$, which is used to check the value of $h_1 = h(C \| M \| M_1 \| 2)$. If the computed value for h_1 does not match with the received value, the session between the client and server is terminated. Otherwise, the client computes SK_C , which is used to compute h_2 , as shown in Figure 2. At the end, the client sends the response message RESPONSE (C, S, h_2) to the server.

Step 4: In the same way, once the server receives the response message, it verifies the value h_2 . First, it computes the SKs. Then it computes $h_2 = h(C \| S \| M \| M_1' \| R_2 \| PW_C \| SK_S)$. If the calculated value for h_2 is equal to the received one in the response message, the server authenticates the client C with the common and unique session key $SK = SK_C = SK_S = r_1 \cdot r_2 \cdot P = r_1 \cdot R_2 = r_2 \cdot N$.

International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 3, Issue 12, December 2015

C and S	The ID of the client and server
PW_c	The password of the client
$h(\cdot)$	strongcryptographicone-wayhash function
$H(\cdot)$	function which makes a point map to another point on elliptic curve
\parallel	concatenation operation
\oplus	exclusive-or operation
K_s	Server password
SK	Session key
Q	Server public key

Table 1: The notations used for proposed authentication scheme.

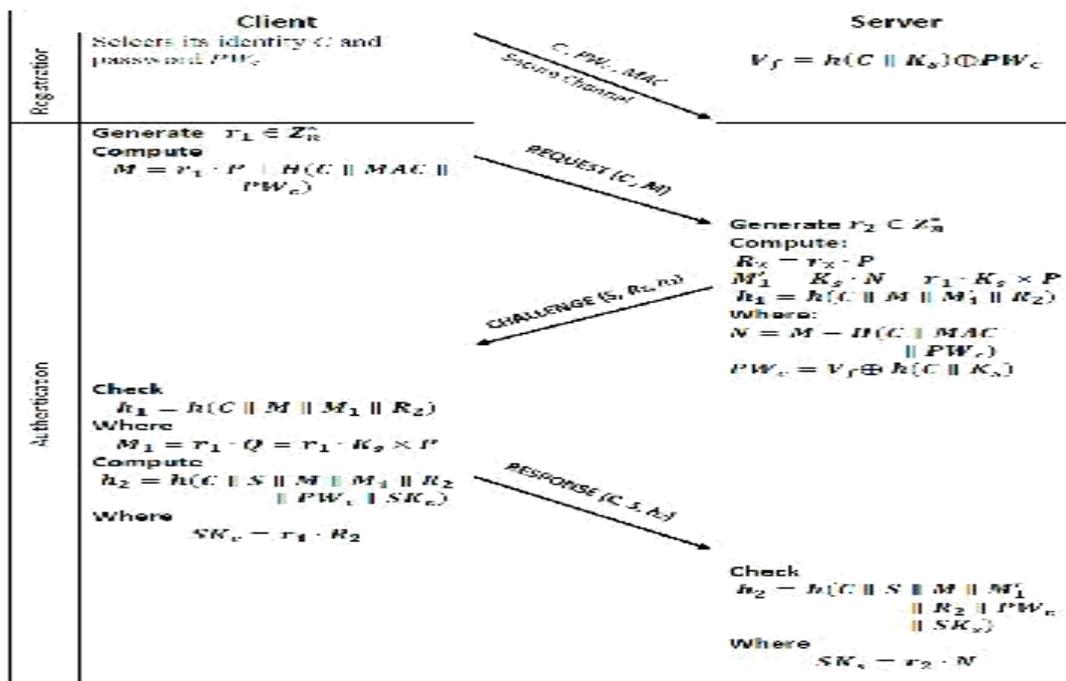


Figure 2: Flow diagram for EAKM technique



International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 3, Issue 12, December 2015

As clear from Figure 2, a one way hash function with XOR operation is used for encrypting or decrypting all communication messages. Therefore, the computation cost (or computational overhead) is quite low, as explained in result section. At the end of the EAKM technique, the digital signature of each client and server are generated and stored in each of them to be used by S-DHCP technique, which is explained in next section.

VI. MESSAGE AUTHENTICATION TECHNIQUE

S-DHCP uses the message authentication technique, which extends DHCP with an integrity/authentication technique for DHCP packets, to mitigate different DHCP attacks. Because S-DHCP is built on top of DHCP, its specification (as for message exchange, timeout, cache) follows the original one for DHCP [4]. Therefore, network clients that do not use S-DHCP module can process the S-DHCP messages. However, in secure LAN, all clients should use S-DHCP. This section describes the message authentication technique.

6.1. Protocol Design Constraints

In order to make the proposed MA technique integrated and compatible with the current DHCP implementation, the following design constraints are adopted:

- The proposed scheme must follow the authentication option format introduced in [7]
- The DHCP client and server state machine must not be changed, i.e. any new state must not be introduced.
- Introducing any new DHCP message is not allowed
- The clients that do not use proposed protocol must be able to obtain configuration information for the server.

In addition to the above, one of the main constraints is that DHCP specification does not permit the fragmentation of DHCP messages. This means that the maximum size of DHCP packet is 1500 bytes; the MTU for Ethernet. By subtracting the length of IP header, UDP header, and DHCP header, the maximum size of option field in DHCP message is 1236 bytes, which is too short. It cannot allow the transmission of a long encryption key or a digital certificate.

6.2. Overview

Figure 3 shows the DHCP message exchange when S-DHCP is enabled in clients and server. Each DHCP message sent by client or server are processed by the MA scheme before being sent through the network. In the initial state, the DHCP client broadcasts a request, which is DISCOVERY message, searching for DHCP server. The client indicates the use of S-DHCP in option field in the message. To use the option field in DHCP messages, the format defined in RFC 3118 is followed, which was proposed for entity and message authentication for DHCP protocol. The option field is used as follows:

- For the Protocol field the new value 4 is used which indicates that the authentication information is attached to message.
- For the Algorithm field a new value 5 is used to mark the using of S-DHCP
- For RDM (Replay Detection Method) field the same value is used as in the specification in RFC 3118.
- For the Replay Detection (RD) field, it contains a monotone strictly increasing counter containing the current time and date which can reduce the danger of replay attacks.

If the DHCP server receives a DHCPDISCOVER message from a client, it passes the message to the DHCP engine if the message's option field indicates that the protocol S-DHCP is enabled. Otherwise, the MA scheme processes the message before passing it to DHCP engine. It verifies the value of Replay Detection field. If the verification process fails, the message is dropped. Otherwise, the server starts to prepare the DHCPOFFER message. The server reserves an IP address for the client and makes a lease offer by sending a DHCPOFFER message to the client. This message contains the following

International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 3, Issue 12, December 2015

- The MAC address of the client
- The offered IP address to the client (IP_c)
- The IP address of the DHCP server (IP_s)
- Lease duration
- The gate way (GW)

In addition, to authenticate and authorize the DHCP OFFER message, the server signature is attached to DHCP OFFER message in the option filed. As shown in Figure 3, the server signature attached to DHCP DISCOVER message includes the secret key shared with the client, the MAC address of the client, IP_c, IP_s, GW, and RD. Also, to mitigate the replay attack, the Replay Detection filed is updated with the correct value.

When the client receives the DHCP OFFER message, the MA scheme passes it to the DHCP engine or process it, depending on the authentication option filed is set or not. If this option is set the MA scheme checks the RD filed. If the value of RD is strictly higher than the old value, the processing continues. Otherwise, the message is discarded.

After checking the RD field, the MA scheme verifies the signature of the server and the integrity of the message. First, it extracts the fields from the message required for signature verification, which are MAC, IP_s, IP_c, GW, and RD. Then, it calculates SS, as shown in figure. If the calculated SS equals to the sever signature attached to the DHCP OFFER message and MAC and IP_c equal to that of the client, it starts to construct the DHCP REQUEST. Otherwise, the message is discarded.

The DHCP REQUEST message is a response to the DHCP OFFER message and it is used to request the offered IP address. Most fields of DHCP REQUEST messages are the same as that of the DHCP OFFER message. The client choose a new value for Replay Detection filed and update it in the message. To authenticate and authorize the DHCP REQUEST message, the signature of the client is attached to this message, which is shown in Figure 3. The CS is generated using the new value for RD field.

After receiving the DHCP REQUEST message, the DHCP server verifies the RD field. Then it validates the client signature. It extracts the required fields for validation; RD, IP_c, IP_s, GW, and MAC. Then it generate the signature CS and compare it with the one attached to the DHCP REQUEST message. If the RD field and signature of the client passes the validation procedure, the server starts to prepare the DHCP ACK message in the same way as DHCP OFFER message explained above. The DHCP ACK message includes all configuration information that the client have requested. When the client receives the DHCP ACK message, it must validate it in same way as explained for DHCP OFFER message. After validation of the DHCP ACK message, the DHCP client starts to configure its network interface with the negotiated parameters.

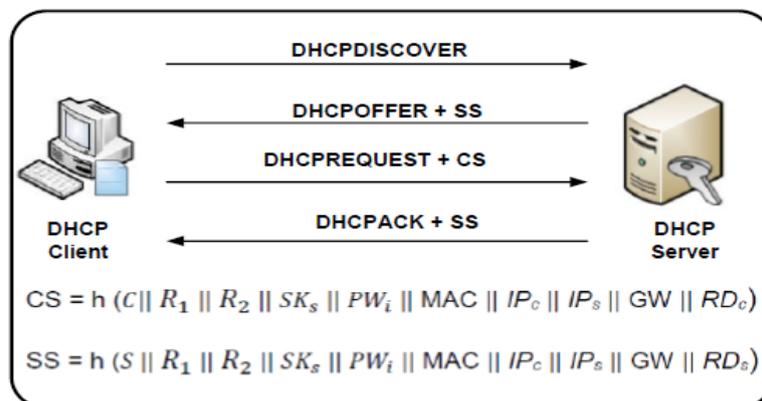


Figure 3: the DHCP message exchange using MA technique



International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 3, Issue 12, December 2015

VII. ANALYSIS OF SECURITY THREATS

This section discuss how the proposed authentication and key management scheme, and MA scheme mitigate main security vulnerabilities that a DHCP server or client can encounter attacks in wireless or wired LAN.

7.1.DHCP Rouge Server Attack

The rogue DHCP server is a DHCP server set up on a network by an attacker, which is not under the control of network administrators. By placing a rogue DHCP server on the network, the attacker can supply its own system as the default gateway and DNS server resulting in a man-in-the-middle attack.

The proposed S-DHCP scheme mitigates the DHCP rouge server attack because the DHCP server authenticate itself to the client during the authentication process and during DHCP message exchange. During the authentication process, the server is authenticated using the parameter $h1$ that depends on v and $M1'$. To generate $M1'$, the attacker must know the client password PW_c , K_s , and r_1 and r_1 . Even if the attacker compromised the password of the client, he cannot generate V_f without compromising the secret K_s (which is a high entropy number) and guessing r_1 which are difficult especially with maintaining the secret K_s periodically. On the other hand, if the attacker steals the secret K_s , he needs the password verifier to access the client password.

After the authentication process and during exchanging DHCP messages, if an authenticated client tries to impersonate the DHCP server, it must have the signature of the legitimate DHCP server. To do that, the attacker must compromise PW_c and SK_s . Also, he must guesses r_1 and r_2 assuming that he have R_1 and R_2 . To compute SK_s , given the public key Q , the attacker must break the Elliptic Curve Discrete Logarithm Problem (ECDLP), which is very difficult problem. Also, given R_1 , R_2 and P , guessing r_1 and r_2 is difficult and cannot be done in polynomial time. In addition, online password guessing cannot succeed, since K_s is a high entropy number that cannot be guessed and the password verifier V_f is not available to attacker.

7.2.DHCP Exhaustion Attack

DHCP starvation attack is designed to deplete all of the addresses within the address space allocated by the DHCP server. The attacker floods the DHCP server with DHCPREQUEST packets of spoofed MAC addresses. Therefore, clients of the victim network is denied an IP address requested via DHCP and thus is not able to access the network. Hence, DHCP starvation can be classified as a denial of service attack. The network attacker can then set up a rogue DHCP server on the network and perform the man in the middle attack, or simply set their machine as the default gateway and can sniff packets.

The proposed scheme can mitigate the DHCP starvation attack. For any received DHCPREQUEST message from any client, the DHCP server verifies the client signature attached to the message. If the DHCPREQUEST message does not contains the client signature, the server that uses S-DHCP discards the request. Otherwise, the server extract the parameters C , MAC , IP_c , IP_s , and RDC for the message header. Then, it uses the parameters C , R_1 , R_2 , SK_s , and PW_c bound with C and MAC address in its database to generate the signature of the client. After that, it compares between the attached client signature and the generated signature. If there any difference between them, the request message is discarded. Otherwise, the request is accepted.

If the attacker changed the MAC address in the header of the DHCPREQUEST message to initiate the DHCP starvation attack and attached any client signature to the message, the DHCP server will detect the difference between the attached client signature and generated signature. The attacker can do the DHCP starvation attack if and only if he has the signatures of many clients. This means he has to guess the parameters R_1 , R_2 , SK_s , and PW_c , supposing that he knows the parameters C and MAC . As explained above, guessing of all these parameters for one client is extremely difficulty. However, to do that for a large number of clients is nearly impossible.

International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 3, Issue 12, December 2015

7.3. Malicious user attack

In the malicious user attack, also called spoofing or masquerading attack, the attacker impersonate the identity of a legitimate user in an illegal manner. The proposed authentication scheme resists against the malicious user attack. To impersonate the user C, the attacker must know the parameters PW_c , C, MAC, and M of the client. Even if the attacker compromised the password of the user PW_c , he cannot compute the correct value of M because he cannot guess the random number r_1 .

7.4. Stolen-Verifier Attack

In the stolen-verifier attack, an attacker may attack the server and steal the database that contains clients' information such as the ID and password verification code. Then the attacker tries to use this information to impersonate the legitimate user. The proposed authentication scheme mitigates this attack, because the attacker cannot compute or guess the client's password even if he has the client ID and password verification code. This because he cannot get the server secret K_s which is not stored in the database.

7.5. Brute-force Password-Cracking Attack

In the brute-force password-cracking attack, an opponent tries repeatedly to guess for the secret parameters such as the password of the client or the server and check them against an available cryptographic hash of the secret parameters. The proposed scheme mitigates this attack because, even if the opponent intercept all exchanged messages by a passive attack and correctly guesses the password, he cannot guess other secret parameters (M, R_2, M_1, M_1'). This is because these parameters are function mapped points to an EC point, which is a very difficult problem.

VIII. PERFORMANCE EVALUATION

This section shows the results of testing the proposed client and message authentication schemes. For performance evaluation of the proposed schemes, they have been implemented using C language with the open source cryptographic library (OpenSSL) [19]. All performance tests are conducted using Ubuntu virtual machines with 3.6 GHz processor and 2 GB of RAM.

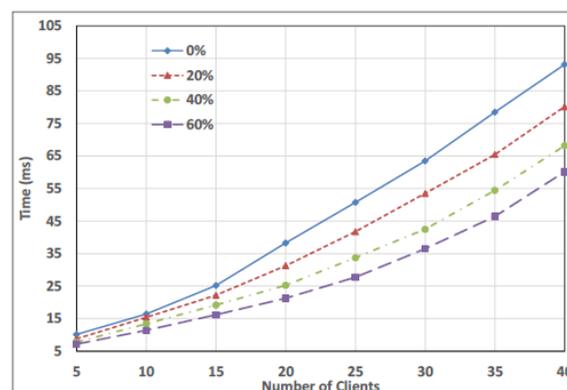


Figure 3: CAT versus N with increasing number of attackers

The client authentication time (CAT), DHCP message authentication time (MAT), and completion time (CT) are the metrics used for performance evaluation of the proposed schemes. CAT is the time taken to authenticate a client, which is the time needed for processing the request, challenge and response messages. The MAT time is the time needed for

International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 3, Issue 12, December 2015

processing and exchanging the DHCPDISCOVER, DHCPPOFFER, DHCPREQUEST, and DHCPACK messages between the client and server. The time needed for receiving the network configuration parameter from DHCP server is called the completion time. CT equals to the sum of CAT and MAT.

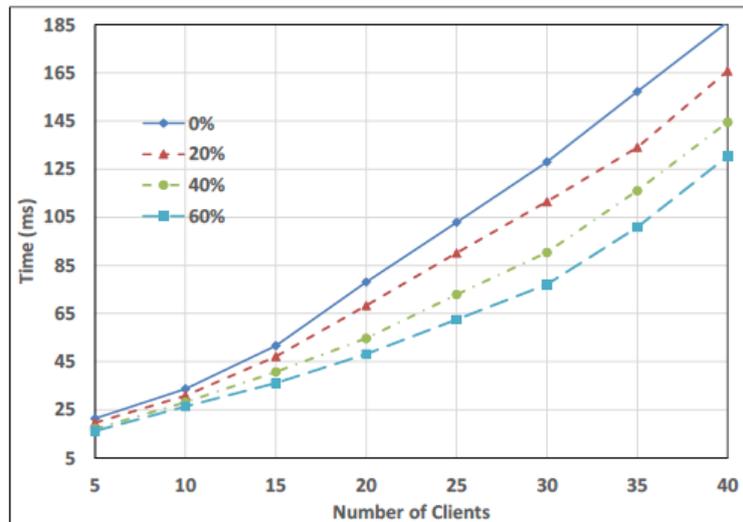


Figure 4: MAT versus N with increasing number of attackers

In all experiments, to measure MAT, CAT, and CT; the experiment is repeated many times until 95% confidence interval with 2% error is reached. For repeated experiments and for each metric, the average of the measured values is computed to be used in analysis and comparisons.

In the first experiment, the number of clients (N) that try to access the local area network at the same instant is increased from 5 to 40 clients. In addition, it is supposed that the network is under attacks and the number of attackers is t percent of all nodes, where t is set to 0%, 20%, 40%, and 60%. The attacker impersonates the identity of the legitimate user and tries to deceive the server to get an offer. In this experiment, the metrics CAT, MAT, and CT are measured and the results are shown in Figure 3, Figure 4, and Figure 5, respectively.

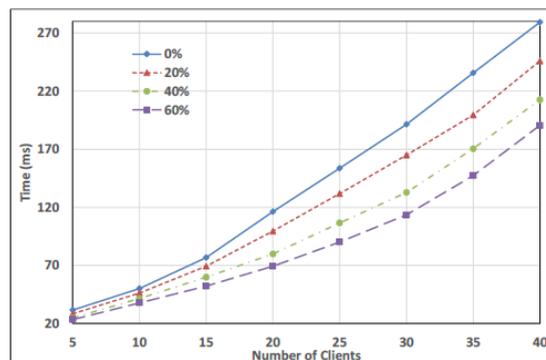


Figure 5: CT versus N with increasing number of attackers

As shown in Figures 3-5, the higher the number of clients the greater the measured value for CAT, MAT, and CT. This is because increasing the number of client increases the time needed for processing messages in the server for either client authentication or message authentication. In addition, for the same number of authenticated clients, it is clear that increasing t decreases the value of CAT, MAT, and CT. This because increasing t increases the number of attackers and decreases the number of legitimate users. In addition, for attackers, the sever does not process the DHCPREQUEST

International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 3, Issue 12, December 2015

and DHCPOFFER messages, as explained in the last section. This indicates the effectiveness of the proposed scheme because it prevents the attacker to complete the attack.

To measure the overhead of using the proposed scheme (S-DHCP), MAT is measured in the case of using S-DHCP and standard protocol (DHCP). As the first experiment, N is varied between 5 and 40, where there is no attackers in the network. Figure 6 shows the results of this experiment. As shown in the figure, the overhead increased from 7.8 ms to 66.2 ms with increasing N from 5 to 40. Although the proposed scheme makes delay in the process of accessing the network by this overhead, it makes the network more secure by mitigating many attacks, as explained in section. In addition, it is clear that overhead is very small.

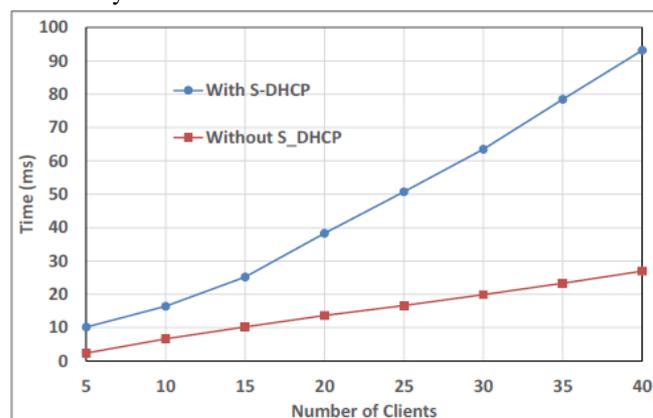


Figure 6: MAT versus N with in the case of using DHCP and S-DHCP

REFERENCES

1. H Xiangdong, et al. "Research on the Switched LAN Monitor Mechanism and its Implementation Method Based on ARP Spoofing", International Conference on Management and Service Science, 2009; 1 - 4
2. HC Altunbasak. "Layer 2 Security Inter-Layering in Networks", Georgia Institute of Technology 2006.
3. The TCP/IP Guide, "DHCP Security Issues", http://www.tcpipguide.com/free/t_DHCPSecurityIssues.htm
4. R Droms. "Dynamic Host Configuration Protocol" RFC 2131, 1997.
5. Ralph Droms, Ted Lemon, "The DHCP Handbook", SAMS 2002.
6. S Alexander, R Droms, "DHCP Options and BOOTP Vendor Extensions", RFC 2132, 1997.
7. RDroms and WArbaugh, "Authentication for DHCP Messages" RFC 3118, 2001.
8. MMJ Stevens, "On Collisions for MD5", Master Thesis, Eindhoven University of Technology, 2007.
9. Lemon and S Cheshire, "Encoding Long Options in the Dynamic Host Configuration Protocol (DHCPv4)", RFC 3396, 2002.
10. Y Xu, et al. "An Authentication Method based on Certificate for DHCP", DHC Internet Draft, 2011.
11. Glenn Glazer, Cora Hussey, Roy Shea, "Certificate-Based Authentication for DHCP", 2003.
12. S Duangphasuk, et al. "Design and Implementation of Improved Security Protocols for DHCP Using Digital Certificates", ICON, Singapore, 2011.
13. KDeGraaf, et al. "Dynamic Host Configuration Protocol (DHCP) Authentication using Challenge Handshake Authentication Protocol (CHAP) Challenge", United States Patent Application Publication, 2011.
14. Ken Hornstein, et al. "DHCP Authentication Via Kerberos V", IETF DHC Working Group, October 2001.
15. Fulvio Ricciardi, "Kerberos Protocol Tutorial", the National Institute of Nuclear Physics Computing and Network Services, LECCE, Italy, 2007.
16. H Ju and JWook Han, "DHCP Message Authentication with an Effective Key Management", World Academy of Science, Engineering and Technology, 2005.
17. T. Komori and T. Saito, "The Secure DHCP System with User Authentication", Proceedings of the 27th Annual IEEE Conference on Local Computer Networks, 2002.
18. C Yang et al. "Secure authentication scheme for session initiation protocol", Computers & Security, Volume 24, Issue 5, August 2005; 381-386.
19. OpenSSL, "OpenSSL Project".