



# Hyperspectral Image Resolution Enhancement Using Object Tagging OLHE Technique

R. Dhivya<sup>1</sup>, S. Agustin Vijay<sup>2</sup>

PG Student, Department of Applied Electronics, Sri Subramanya College of Engineering and Technology, Palani,  
Tamilnadu, India<sup>1</sup>

Assistant Professor, Department of ECE, Sri Subramanian College of Engineering and Technology, Palani, Tamilnadu,  
India<sup>2</sup>

**ABSTRACT:** Resolution plays an important role in hyperspectral images like satellite images. The discrete wavelet transform based (DWT) resolution enhancement scheme generates artifacts due to a shift-variant property. Resolution enhancement based on dual-tree complex wavelet transform (DT-CWT) and nonlocal means (NLM) suffers from high latency. In this paper a new method based on oriented local histogram equalization (OLHE) is proposed for resolution enhancement of hyper spectral images. Satellite Images acquired by satellite is affected by impulse noise.

This impulse noise distorts the edge pixels in the satellite image, which degrades the segmentation process. Hence, this impulse noise should be removed before enhancing satellite images. Optimum Edge preserving impulse noise removing algorithm is proposed in this paper to remove the impulse noise present in the satellite image. OLHE technique which is similar to local histogram equalization is proposed to capture the orientation of edges in the image that enhances the resolution. Performance analysis is made by calculating PSNR and MSE value which reveals superiority of the proposed technique over the conventional and state-of-the-art RE techniques.

**KEY WORDS**— Oriented Local Histogram Equalization (OLHE), Resolution Enhancement (RE), Hyperspectral Image.

## I. INTRODUCTION

Resolution of an image has been always an important issue in many image-and video-processing applications such as video resolution enhancement, feature extraction, and satellite image resolution enhancement. The performance of the proposed technique over performs all available state-of-art methods for image resolution enhancement. The visual and quantitative results are given in the results and discussions section

Interpolation in image processing is a method to increase the number of pixels in a digital image. Interpolation has been widely used in many applications, such as facial reconstruction, multiple description coding, and image resolution enhancement. The interpolation-based image resolution enhancement has been used for a long time and many interpolation techniques have been developed to increase the quality of this task. There are three well-known interpolation techniques, namely, nearest neighbour, bilinear, and bicubic. Bicubic interpolation is more sophisticated than the other two techniques and produces smoother edges.

The essential thought behind the Histogram of Oriented Gradient descriptors is that local object appearance and shape within an image can be described by the distribution of intensity gradients or edge directions. The implementation of these descriptors can be achieved by dividing the image into small connected regions, called cells, and for each cell



## **International Journal of Innovative Research in Computer and Communication Engineering**

(An ISO 3297: 2007 Certified Organization)

Vol.2, Special Issue 1, March 2014

### **Proceedings of International Conference On Global Innovations In Computing Technology (ICGICT'14)**

**Organized by**

**Department of CSE, JayShriram Group of Institutions, Tirupur, Tamilnadu, India on 6<sup>th</sup> & 7<sup>th</sup> March 2014**

compiling a histogram of gradient directions or edge orientations for the pixels within the cell. The combination of these histograms then represents the descriptor. For improved accuracy, the local histograms can be contrast-normalized by calculating a measure of the intensity across a larger region of the image, called a block, and then using this value to normalize all cells within the block. This normalization results in better invariance to changes in illumination or shadowing.

## **II.RELATED WORKS**

**RESOLUTION** (spatial, spectral, and temporal) is the limiting factor for the utilization of remote sensing data (satellite imaging, etc.). Spatial and spectral resolutions of satellite images (unprocessed) are related (a high spatial resolution is associated with a low spectral resolution and vice versa) with each other [1]. Therefore, spectral, as well as spatial, resolution enhancement (RE) is desirable. Interpolation has been widely used for RE [2], [3]. Commonly used interpolation techniques are based on nearest neighbors (include nearest neighbor, bilinear, bicubic, and Lanczos).

The Lanczos interpolation (windowed form of a sinc filter) is superior than its counterparts (including nearest neighbor, bilinear, and bicubic) due to increased ability to detect edges and linear features. It also offers the best compromise in terms of reduction of aliasing, sharpness, and ringing [4].

Methods based on vector-valued image regularization with partial differential equations (VVIR-PDE) [11] and inpainting and zooming using sparse representations [6] are now state of the art in the field (mostly applied for image inpainting but can be also seen as interpolation). RE schemes (which are not based on wavelets) suffer from the drawback of losing high-frequency contents (which results in blurring). RE in the wavelet domain is a new research area, and recently, many algorithms [discrete wavelet transform (DWT) [6], stationary wavelet transform (SWT) [8], and dual-tree complex wavelet transform (DT-CWT) [5] have been proposed [7]–[11]. An RE scheme was proposed in [9] using DT-CWT and bicubic interpolations, and results were compared (shown superior) with the conventional schemes (i.e., nearest neighbor, bilinear, and bicubic interpolations and wavelet zero padding). More recently, in [6], a scheme based on DWT and bicubic interpolation was proposed, and results were compared with the conventional schemes and the state-of-art schemes (wavelet zero padding and cyclic spinning [12] and DT-CWT [9]). Note that, DWT is shift variant, which causes artifacts in the RE image, and has a lack of directionality; however, DT-CWT is almost shift and rotation invariant [13]. DWT-based RE schemes generate artifacts (due to DWT shift-variant property).

In[13] DT-CWT-based nonlocal-means-based RE (DT-CWT-NLM-RE) technique, using the DT-CWT, Lanczos interpolation, and NLM. Note that DT-CWT is nearly shifted invariant and directional selective. Moreover, DT-CWT preserved the usual properties of perfect reconstruction with well-balanced frequency responses [13], [14]. Consequentially, DT-CWT gives promising results after the modification of the wavelet coefficients and provides less artifacts, as compared with traditional DWT. Since the Lanczos filter offer less aliasing, sharpness, and minimal ringing, therefore, it a good choice for RE. NLM filtering [13] is used to further enhance the performance of DT-CWT-NLM-RE by reducing the artifacts. This technique produces high latency.

## **III.PRELIMINARIES**

### **A. HYPERSPECTRAL IMAGE**

Many applications involve the detection of an object or activity such as a military vehicle or vehicle tracks. Hyper spectral imaging sensors provide image data containing both spatial and spectral information, and this information can be used to address such detection tasks.

The basic idea for hyper spectral imaging stems from the fact that, for any given material, the amount of radiation that is reflected, absorbed, or emitted i.e., the radiance varies with wavelength. Hyper spectral imaging sensors measure the radiance of the materials within each pixel area at a very large number of contiguous spectral wavelength bands. A hyper



spectral remote sensing system has four basic parts: the radiation (or illuminating) source, the atmospheric path, the imaged surface, and the sensor. Satellite images are hyperspectral images which can be used for resolution enhancement.

## **B.HISTOGRAM EQUALIZATION**

An image histogram is a type of histogram that acts as a graphical representation of the tonal distribution in a digital image. It plots the number of pixels for each tonal value. By looking at the histogram for a specific image a viewer will be able to judge the entire tonal distribution at a glance. Image histograms are present on many modern digital cameras. Photographers can use them as an aid to show the distribution of tones captured, and whether image detail has been lost to blown-out highlights or blacked-out shadows.

Histogram Equalization method usually increases the global contrast of many images, especially when the usable data of the image is represented by close contrast values. Through this adjustment, the intensities can be better distributed on the histogram. This allows for areas of lower local contrast to gain a higher contrast. Histogram equalization accomplishes this by effectively spreading out the most frequent intensity values.

## **C.LOCAL HISTOGRAM EQUALIZATION**

Histogram equalization is used for enhancing the contrasts in an intensity image. This normally works quite well for smaller images or images where almost all of the different intensity levels are represented. Histogram equalization is a technique used to improve contrast in face images. It differs from ordinary histogram equalization in the respect that the Local method computes several histograms, each corresponding to a distinct section of the image, and uses them to redistribute the lightness values of the image. Histogram Equalization is applied on the entire image. Local Histogram Equalization is applied on the 3\*3 over lapped block on the whole image. For each pixel on an image, we perform the histogram equalization on the local w-by-h window centering on this pixel using:

$$f(x) = \text{round} \left[ \frac{\text{cdf}(x) - \text{cdf}_{\min}}{w \cdot h - \text{cdf}_{\min}} (L - 1) \right] \quad (1)$$

where x is the pixel intensity value, cdf(x) is the cumulative distribution function of the histogram of the pixel intensities in the w-by-h window, cdfmin is the minimum intensity in this window, and L is the desired number of output gray levels=256.

Typically a square window is used, and we define  $k \equiv w = h$ . We call the center of the k-by-k window the anchor. For LHE, the anchor point is the pixel to be processed itself. For the whole image, each pixel repeats the above operation and uses f(x) to get its new intensity value.

## **IV. PROPOSED WORK**

Proposed method is using a novel algorithm based on finding the optimal direction used as a measure to detect whether the tested pixel is noisy or noise-free pixel. More edge pixels can be detected if the accurate or optimal direction of the edge is determined. The noisy pixel that has small deviations with the pixels in the optimal direction is deemed an original pixel. Optimum Edge preserving impulse noise removing algorithm based land scale satellite image segmentation is proposed. OLHE (oriented local histogram equalization) is similar to local histogram equalization (LHE), but it captures the orientation of edges while LHE does not.

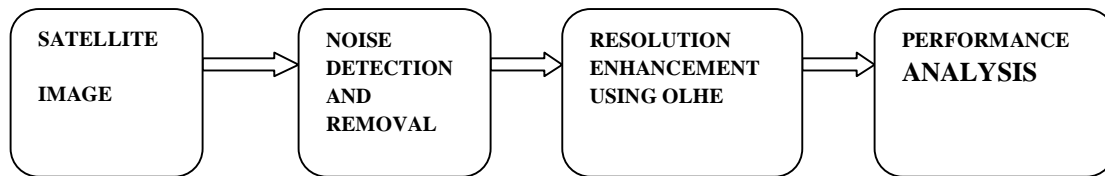


Figure 1 Block diagram of proposed system

## ALGORITHM DESCRIPTION

In the Algorithm Description method, the filtering window is divided into four directions. Each direction has an equal number of pixels. These pixels may be located in a smooth area or on an edge. The key point is to find the optimal direction to be used as a reference, or a scale to find out whether the tested pixel is noisy or noise-free pixel. The optimal direction is the direction that has the most similar pixels. Hence, for each pixel to be judged as an original, it should have small deviations with the pixels in the optimal direction. The proposed algorithm may be described as follows.

If the first pixel in a window of size  $K \times K$  is denoted by  $x_{ij}$ , then the total pixels in the window, except the central pixel  $x_{i+(k+1)/2, j+(k+1)/2}$  are divided into four directions as shown in figure 5.2.

1) The  $D_d^{ij}$ ,  $d=1:4$  for a window of  $9 \times 9$  size, and a first pixel  $x_{0,0}$ , the pixels in each direction are listed in terms of their coordinates as follows:

$$\begin{aligned}
 D_1^{0,0} &= \{(0,0), (1,1), (2,2), (3,3), (5,5), (6,6), (7,7), (8,8)\} \\
 D_2^{0,0} &= \{(0,8), (1,7), (2,6), (3,5), (5,3), (6,2), (7,1), (8,0)\} \\
 D_3^{0,0} &= \{(0,4), (1,4), (2,4), (3,4), (5,4), (6,4), (7,4), (8,4)\} \\
 D_4^{0,0} &= \{(4,0), (4,1), (4,2), (4,3), (4,5), (4,6), (4,7), (8,8)\}
 \end{aligned} \tag{2}$$

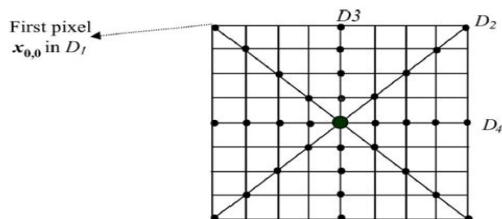


Figure 2 A  $9 \times 9$  window divided into 4 directions

2) Then, the pixels in each direction  $D_d^{ij}$  are sorted in ascending manner, so that the outlier pixels can be specified. The new vector  $r_d^{ij}$  that attained from the corresponding sorted direction



## International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Vol.2, Special Issue 1, March 2014

### Proceedings of International Conference On Global Innovations In Computing Technology (ICGICT'14)

Organized by

Department of CSE, JayShriram Group of Institutions, Tirupur, Tamilnadu, India on 6<sup>th</sup> & 7<sup>th</sup> March 2014

$D_d^{ij}$  is defined as

$$r_d^{ij} = \{x_{1,s}^d | x_{1,s}^d \in D_d^{ij}, s=1 : k-1, d=1 : 4, x_{1,s+1} \geq x_{1,s}\} \quad (3)$$

3) The smallest and the largest pixels in every direction are expected to be outliers, therefore they are removed. Hence, a new vector of  $r_d^{-ij}$  lower elements is defined as

$$r_d^{-ij} = \{x_{1,s}^d | s = 2 : k-2, d = 1 : 4\} \quad (4)$$

$\sigma_{r_d^{ij}}$  is the standard deviation of the pixels in the vector  $r_d^{ij}$ . Equation (4) means that the optimum direction is the direction that has the most similar pixels.

4) The optimum direction  $D^{op}$  is attained by finding the vector  $r_d^{ij}$  that has the minimum standard deviation :

$$D^{op} = \text{argmin} \{r_d^{\sigma^{-ij}}\} \quad (5)$$

$\sigma_{r_d^{ij}}$  is the standard deviation of the pixels in the vector  $r_d^{ij}$ . Equation (4) means that the optimum direction is the direction that has the most similar pixels.

5) For detecting the central pixel  $x_{i+(k+1)/2, j+(k+1)/2}$  whether it is noisy or noise-free pixel, a similarity parameter  $S$  is calculated by measuring the normalized distance between the tested pixel, and the pixels in the optimal direction. By denoting the subscript  $i + (k+1)/2$  by  $\tilde{i}$

and  $j + (k+1)/2$  by  $\tilde{j}$ ,  $S$  is defined as

$$S = \sum_{s=2}^{k-2} \left| \frac{x_{1,s}^{op} - x_{\tilde{i}, \tilde{j}}}{255} \right| \quad (6)$$

Where  $x_{1,s}^{op}$  is the pixel  $S$  in the optimal direction.

6) By using a proper threshold, we can decide if the tested pixel is a noisy  $x_{no}$  or an original pixel  $x_{or}$ . Also, it is clear from (5) that the range of  $S$  is  $[0, k-3]$  which is the bounds of  $S$ . Thus,

$$x_{(i,j)}^{(~~)} = \begin{cases} 1 & \text{if } S < T, \{0 \leq T \leq k-3\} \\ 0 & \text{else} \end{cases} \quad (7)$$

The threshold  $T$  should have a value close to zero. The reason is that the tested pixel to be considered as an original should be similar to the pixels in the optimum direction, or lead to a small value of  $S$ . The central pixel is flagged as 1 in a binary image, if it is detected as an original pixel, and flagged as 0, if it is detected as a noisy pixel. The detected noisy pixel is omitted immediately and is not involved in the detection process any more.

7) After detecting all pixels in the noisy image, the restoration process for getting the first restored image begins. Any pixel flagged as 0 is restored by replacing it by the median of its good neighboring pixels. Pixels among the neighboring ones

that flagged as 0, and not restored yet, are excluded from the restoration process. Thus, the restored pixel  $x_{i,j}^{rest}$  is given by

$$x_{i,j}^{rest}(\text{rest}) = \text{median}(x_{i+s,j+t} | 0 \leq s, t \leq (k-1)) \quad (8)$$

8) The previous steps are implemented again on the first restored image, so that we can get a new restored image with better visual quality. Also, the closest four pixels are preferable to be used in the second restoration process for estimating the noisy pixel. The first detection process is used for removing the impulse noise that has sharp intensity values, while the second one is used for removing the impulse noise that has somewhat small differences with the pixels in the optimum direction. Thus, we use a threshold  $T_1$  of higher value in the first iteration, and a threshold  $T_2$  in the second iteration. The window size should be large enough, particularly at high noise rates to avoid finding an empty direction—a direction that is out of pixels (all its pixels are detected as noisy pixels). In the case of empty direction, it is difficult to determine the optimal direction.

## V.RESULTS AND DISCUSSION

To ascertain the effectiveness of the proposed Local histogram equalization RE algorithm over other wavelet-domain RE techniques, different LR optical images obtained from the Satellite Imaging Corporation webpage [1] were tested. The image of Washington DC ADS40 Orthorectified Digital Aerial Photography –0.15 m is chosen here for comparison with existing RE techniques.



**Figure 3 Original Satellite Image**



**Figure 4 Resolution Enhanced Image**





**Table 1 Comparison of the Existing and Proposed for the 'Washington DC' image**

SI.NO	ALGORITHM	MSE	PSNR
1	SWT-RE	0.0464	13.3332
2	DWT-RE	0.0419	13.7802
3	SWT-DWT-RE	0.0335	14.7527
4	VVIR-PDE-RE	0.0269	15.697
5	LANCZOS-RE	0.0253	15.9770
6	DT-CWT-RE	0.0242	16.1576
7	DT-CWT-NLM-RE	0.0174	17.5895
8	PROPOSED LHE-RE	0.0121	66.61

Table 1 shows that the proposed techniques provide improved results in terms of MSE and PSNR as compared with other techniques. It is clear that the proposed LHE-RE, schemes outperform DT-CWT-RE, DTCWT-NLM-RE, SWT, DWT, SWT-DWTRE, VVIR-PDE-RE, and DT-CWT-RE techniques qualitatively and quantitatively.

## VI. CONCLUSION

An RE technique based on local histogram equalization algorithm has been proposed. The technique decomposes the LR input image using optimum edge preserving impulse noise removal. Wavelet coefficients and the LR input image were interpolated using the Lanczos interpolator. The proposed technique has been tested on well-known benchmark images, where their PSNR and MSE and visual results show the superiority of the proposed technique over the conventional and state-of-art image resolution enhancement techniques. The PSNR improvement of the proposed technique is upto 66.61dB compared with the DT-CWT-NLM-RE. This work is mainly preferred for low resolution images though they give enhancement output to high resolution images as well. The precision and accuracy of enhancement will be more for low resolution images when compared with high resolution images. When this work is applied to high resolution images, we only get an accuracy of 70% but for low resolution images we obtain an accuracy of about 95% on the output image. Simulation results highlight the superior performance of proposed techniques.

## REFERENCES

- [1] [Online].Available:<http://www.satimagingcorp.com/>
- [2] Chen. T, Ma.K. K., and Chen. H.,(2000), "Tri-state median filter for image denoising", IEEE transaction image processing , vol. 8, pp 1834-1839
- [3] Chen. T and Wu. R. H., (1999), "Adaptive impulse detection using center weighted median filters", IEEE transaction image processing , vol. 6, pp 146-153.
- [4] Chen. T., and Wu. H. R.,(1999), "Space variant median filters for the restoration of Impulse noise corrupted images", IEEE transaction image processing , vol. 7, pp 1634- 1639.
- [5] Demirel.H and Anbarjafari.G.,(2011), "image resolution enhancement by using discrete and stationary wavelet decomposition," ieee trans. Image process., vol. 20, no. 5, pp. 1458– 1460.
- [6] Demirel.H and Anbarjafari.G.,(2011), "discrete wavelet transform-based satellite image resolution enhancement," ieee trans. Geosci. Remote sens., vol. 49, no. 6, pp. 1997–2004,
- [7] Demirel.H and Anbarjafari.G.,(2010), "Satellite image resolution enhancement using complex wavelet transform," IEEE Geosci. Remote Sens. Lett., vol. 7, no. 1, pp. 123–126.
- [8] Jane cullum and Ralp.A Willoughby,(2010), " A survey of Lanczos procedures for very large real 'symmetric' eigenvalue problems", Watson research center, yorktown heights, new york, 10598.
- [9] Karakos and Trahanias.P,(2003), "combining vector median and vector directional filters:the directional distance filters", IEEE signal precess. Mag., vol. 22, no. 6, pp. 123–151.



**International Journal of Innovative Research in Computer and Communication Engineering**

(An ISO 3297: 2007 Certified Organization)

Vol.2, Special Issue 1, March 2014

**Proceedings of International Conference On Global Innovations In Computing Technology (ICGICT'14)**

**Organized by**

**Department of CSE, JayShriram Group of Institutions, Tirupur, Tamilnadu, India on 6<sup>th</sup> & 7<sup>th</sup> March 2014**

- [10] Selesnick. W., Baraniuk. R. G and Kingsbur. N.G.(2005), "The Dual-Tree Complex Wavelet Transform", IEEE signal process. Mag., vol. 22, no. 6, pp. 123–151.
- [11] Trahanias. P, anda. N and Venetsanopoulos,(2003), "vector directional filters—a new class of multichannel image process filters", IEEE signal process. Mag., vol. 22, no. 6, pp. 123– 151.
- [12] Tschumperle.D and Deriche.R,( 2005) "vector-valued image regularization with pde's: a common framework for different applications," ieee trans. Pattern anal. Mach. Intell., vol. 27, no. 4, pp. 506–517,.
- [13] Muhammad zafar iqbal, abdul ghafoor, and adil masood siddiqui,(2013), "Satellite image resolution enhancement using Dual-tree complex wavelet transform And nonlocal means",Ieee geoscience and remote sensing letters, vol. 10, no. 3.
- [14] Wang. Z and Zhang. D, (1998), "progressive switching median filter for the removal of impulse noise from highly corrupted images", IEEE Geosci. Remote Sens. Lett., vol. 7, no.1, pp. 123–126.