

**RESEARCH PAPER**

Available Online at [www.jgrcs.info](http://www.jgrcs.info)

## A NEW APPROACH TO EDGE DETECTION USING RULE BASED FUZZY LOGIC

Er. Manpreet Kaur\*<sup>1</sup>, Ms. Sumeet Kaur<sup>2</sup>

<sup>1</sup>M.Tech. Computer Science, YCOE, Guru Kashi Campus, Talwandi Sabo, Bathinda.  
manpreet.mtech@gmail.com

<sup>2</sup>Asst. Prof., CSE Deptt., YCOE, Guru Kashi Campus Talwandi Sabo, Bathinda.  
purbasumeet@yahoo.com

**Abstract:** Edge is a basic feature of image. The image edges include rich information that is very significant for obtaining the image characteristic by object recognition. Edge detection is the most commonly used technique in image processing. So this paper represents a modified rule based fuzzy logic technique, because fuzzy logic is desirable to convert the uncertainties that exist in many aspects of image processing. Here firstly the gradient and standard deviation is calculated and used as input for fuzzy system. The traditional algorithm like Sobel, Prewitt, LoG are implemented and then the results are compared with modified algorithm and concluded that the proposed technique is to find the more fine edges and reduce the pixels that are not belonging to the edge.

**Keywords:** Image Processing, Edge detection, Fuzzy logic, Defuzzification, Edge, Fuzzy Inference system

### INTRODUCTION

When we imitate the human visual system by using computer algorithms, quite a lot of problems can be encountered. Penetration of computers into each area of the market and living has forced the designers to add the capability to see and analyze and to innovate more and more into the area of electronic vision or image processing. At the level of computational intelligence for electronic vision, many of the algorithms have been developed to extract different types of features from the image such as edges, segments and lot many other types of image features. The goal of the edge detection process in a digital image is to determine the frontiers of all represented objects, based on automatic processing of the color or gray level information in each present pixel. This procedure has many applications in image processing and computer vision, and is an indispensable technique. An edge is defined by a discontinuity in gray level values. In other words, an edge is the boundary between an object and the background. The shape of edges in images depends on many parameters: The geometrical and optical properties of the object, the illumination conditions, and the noise level in the images. Edges include the most important information in the image, and can provide the information of the object's position.[1] Edge detection is an important link in computer vision and other image processing, used in feature detection and texture analysis. Most previous edge detection techniques used first-order derivative operators such as the Sobel edge operator, [2] the Prewitt edge operator and the Robert edge operator. The Laplacian operator is a second order derivative operator for functions of two-dimension operators and is used to detect edges at the locations of the zero crossing. Recent examples include edge detectors using fuzzy logic, neural

networks, or wavelets [Sun and Sciabassi 1995, Law *et al.* 1996, Bezdek *et al.* 1996, Wang *et al.* 2005]. Comparison of edge detection approaches and an assessment of their performance may be found in [Demigny *et al.* 1995, Ramesh

and Haralick 1994]. In this paper, fuzzy logic based approach to edge detection in digital images is proposed. Firstly, for each pixel in the input image edginess' measure is calculated using three 3 x 3 linear filters after which three fuzzy sets characterized by three (3) Gaussian membership functions associated to linguistic variable Low, Medium and High were created to represent each of the edge strengths. The second phase involves application of fuzzy inference rule to the three fuzzy sets to modify the membership values in such a way that the fuzzy system output (edge) is high only for those pixels belonging to edges in the input image. The last step is final pixel classification as edge or non-edge using Mamdani defuzzification method.

### APPLICATION OF FUZZY LOGIC BASED EDGE DETECTION

Many techniques have been suggested [1] by researchers in the past for fuzzy logic-based edge detection [Cheung and Chan 1995, Kuo, *et al.* 1997, El-Khamy *et al.* 2000]. In [Zhao, *et al.* 2001], Zhao, *et al.* proposed an edge detection technique based on probability partition of the image into 3-fuzzy partitions (regions) and the principle of maximum entropy for finding the parameters value that result in the best compact edge representation of images. In their proposed technique the necessary condition for the entropy function to reach its maximum is derived. Based on this condition an

effective algorithm for three-level threshold is obtained. Several approaches on fuzzy logic based edge detection have been reported based on fuzzy If-Then rules. A similar work is proposed by Mansoori, *et al*. [Mansoori, *et al*. 2006], wherein adjacent points of each pixel are grouped in six different set. Then by using of appropriate bell shape membership function, the value from zero to one is determined for each group. Based on the membership values, and fuzzy rules, decision about existing/not existing and direction of edge pixels are obtained. Some advantages and disadvantages of Fuzzy Logic:

**Advantages:**

- Helpful for very complex or lightly nonlinear processes.
- Allows use of “fuzzy” concepts like medium, low, etc.
- Biggest impact is for control problems.
- Help avoid discontinuities in behavior.

**Disadvantages:**

- Sometimes results are unexpected and hard to debug.
- Computationally complicated
- According to literature, Fuzzy Logic is not recommendable, if conventional approach yields a satisfying result.

**A. Fuzzy Inference System**

Fuzzy systems are made of a knowledge base and reasoning mechanism called fuzzy inference system. A fuzzy inference system (FIS) consists of four functional blocks as shown in Figure

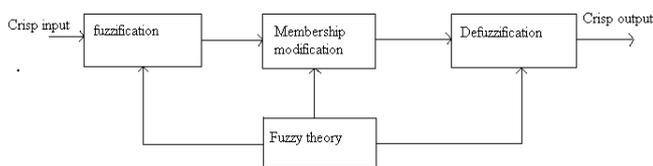


Figure1: Fuzzy Inference System

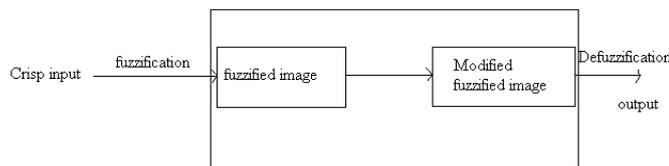


Figure 2: Membership Modification

**Fuzzification:** Transforms the crisp inputs into degrees of match with linguistic values. Reverse process of defuzzification.

**Knowledge Base:** Consists of a rule base and a database. A rule base contains a number of fuzzy if-then rules. A database defines the membership function of the fuzzy sets used in the fuzzy rules.

**Fuzzy Inference Engine:** Fuzzy Inference engine performs the inference operations on the rules.

**Defuzzification:** This conversion of fuzzy set to single crisp value is called defuzzification.

**B. Motivation behind Fuzzy Image Processing** There are many reasons to do this. The most important of them are follows:

- Fuzzy is powerful tool to knowledge representation and process human knowledge in form of fuzzy if then rules.
- Fuzzy techniques can manage the ambiguity efficiently and vagueness (an image can be represented as a fuzzy set).

**PROPOSED WORK**

In this paper, at first an input image is pre-process to accentuate or remove a band of spatial frequencies and to locate in an image where there is a sudden variation in the grey level of pixels. For each pixel in the image edge strength value is calculated with three (3) 3×3 linear spatial filters i.e. low-pass, high-pass and edge enhancement filters (Sobel) through spatial convolution process. In carrying out a 3×3 kernel convolution, nine convolution coefficients called the convolution mask are defined. The edge strength values derived from the three (3) masks served as the inputs used in the construction of the fuzzy inference system based on which decision on pixel as belonging to an edge or not are made. Membership functions are defined for fuzzy system inputs.

For fuzzy logic rules depends on the weights of 8 neighbors grey level pixels .The ability of the rule is to extract all the edges directly in the processed image. The four rules are dealing with the checked or centre pixel of mask .If the greys in one line are black then checked pixel will be white otherwise it will remain same because there is no need to convert it into black otherwise. So this group of rules is to find edges, black pixel or white pixel. In the fuzzy inference system the input will be given from the range of 0-1.Then the fuzzy construction side the input greys is ranged from 0-255 grey intensity. And here these grey levels are converted into the mathematical values for input to the membership functions and the output is again presented to values from 0-255 after applying defuzzification process. It is found that the best results are obtained by using the threshold value 80; here we get black between 0-80 and white between 80-255. There are different methods used for edge detection so in first method the gradient values are computed and is compared with the threshold value ,pixels with greater gradient value than the threshold value will be considered as edge candidate[3] .similarly the second method is calculating the standard deviation and compared with threshold value and pixel with higher SD then threshold value will be the edge candidate .The next step is to apply first order gradient and standard deviation and then apply fuzzy rules .so two computed values are used as inputs for the fuzzy system.[2] The final decision will be based on the output. Before applying rules ,both the gradient and SD are mapped to range of [0 to 100] and are classified as low ,medium ,high classes the classes are represented as SL,SM and SH, there are four thresholds used a1 ,c1 ,a2 , c2 .and the classification of edges will be according to the values ,if SD value is in range of [0 c1] the pixel is SL SD value is in range of [a1 c2] the pixel is SM SD value is in range of [a2 100] the pixel is SH. Similarly for the gradient values:

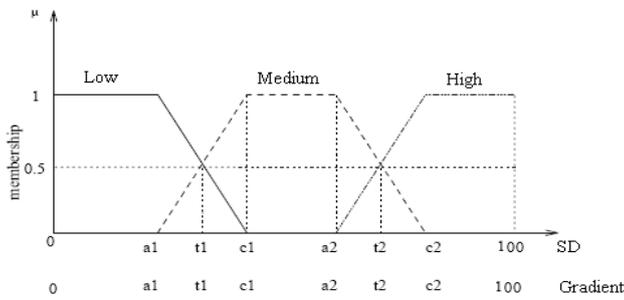


Figure3: The defined classes and membership functions

Here the value for c-low is 0.25, c-medium is 0.5 and c high is 0.75.

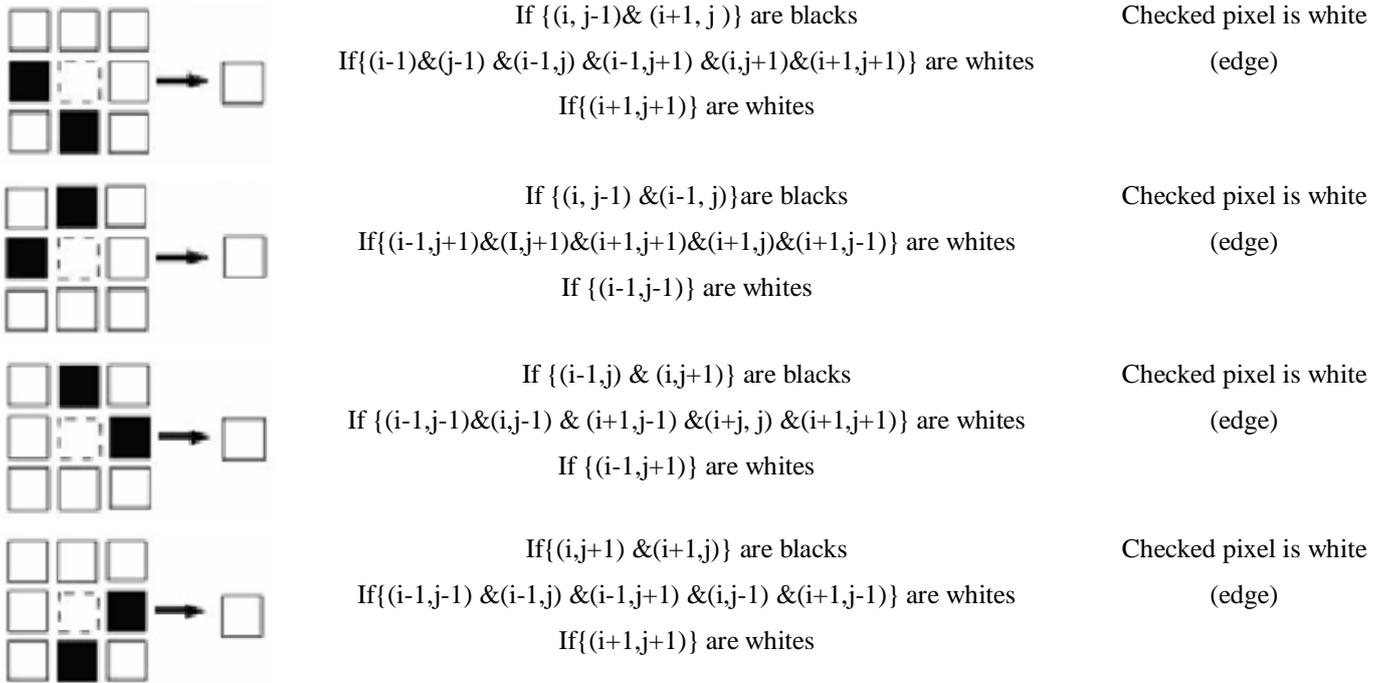


Figure 4: Modified Fuzzy System rules

**CONCLUSION**

Modified rule based edge detection technique is presented in this paper. The standard deviation and gradient values are used as input for fuzzy system using membership function .Fuzzy if-then else rules are applied to modify the membership to one of Low, medium and high classes. Finally defuzzification is performed. The three edge strength values used as fuzzy system inputs were fuzzified using Gaussian membership functions. Fuzzy if then rules are applied to modify the membership to one of low, medium, or high classes.

It is shown that the proposed technique is less computationally expensive. It improves the quality of edges as compared to Sobel ,Prewitt and LoG operator. This algorithm is suitable for applications in the area of digital image processing for face recognition, medical imaging, remote sensing, where specific boundaries need to be specified for further image analysis. So the values for these classes are

Then the final edge pixel will be calculated as

$$Edge_{final} = (sl * gl * cl) + (sl * gm * cl) + (sl * gh * cm) + (sm * gl * cl) + (sm * gm * cm) + (sm * gh * ch) + (sh * gl * cm) + (sh * gm * ch) + (sh * gh * ch)$$

Finally compared to the threshold equal to 0.26, pixel is classified as edge.

**RESULTS**

The proposed algorithm is modified rule based edge detection using fuzzy logic. A new modified algorithm is implemented and its results are compared with the existing edge detectors like Prewitt (b) and LoG(c) and sobel (d). The results are applied on different images .As shown in fig-5(a) the original images of Lena, Beans and Bamboon and the output image fig 5(b) with operator Prewitt is showing clear but very thick edges .Similarly LoG in fig-5(c) and Sobel in fig 5(d) are thicker than the output of the proposed algorithm shown in fig-5(e) .

**FUTURE SCOPE**

The designed fuzzy rules are a good solution to improve the quality of edges .In this paper a modified technique of edge detection is introduced that is based on primary edge detection methods including gradient and standard deviation is calculated here. Then the fuzzy inference system decides that whether the pixel is an edge candidate or not. The



5(a)

5(b)

5(c)

5(d)

5(e)

proposed method shows better outputs as compared to sobel, Log, Prewitt.

The future scope for this work can be modification of membership functions to get good results for very low

contrast images and it can be applied on the colour images also. Also work can be done on the images where contrast varies a lot.

Figure 5: Outputs showing results

## REFERENCES

- [1] Novel Fuzzy logic Based Edge Detection Technique, Aborisade, D.O, International Journal of Advanced Science and Technology Vol. 29, April, 2011.
- [2] Fuzzy Edge Detection Based on Pixel's Gradient and Standard Deviation Values, Wafa barkhoda, Fardin Akhlaqian Tab, Om-Kolsoom Shahryari, Proceedings of the International Multiconference on ISBN 978-83-60810-22-4, Computer Science and Information Technology.
- [3]. Applications of Advanced Fuzzy Logic Techniques in Fuzzy Image Processing Scheme ,M. Hari Krishnan and 2R. Viswanathan, Advances in Fuzzy Mathematics ISSN 0973-533X Volume 5, Number 1 (2010).
- [4] Edge Detection in Digital Images Using Fuzzy Logic Technique Abdallah A. Alshennawy, and Ayman A. Aly, World Academy of Science, Engineering and Technology 51 2009.
- [5] Edge Detection Technique by Using Neuro Fuzzy Ssystem Vandana Mittal, Mrs. Shalini Batra, Proceedings of 2nd National Conference on Challenges & Opportunities in Information Technology (COIT-2008) RIMT-IET, Mandi Gobindgarh. March 29, 2008.
- [6] Fuzzy Inference System Applied to Edge Detection in Digital Images Cristiano Jacques Miosso1, Adolfo Bauchspiess, Proceedings of the V Brazilian Conference on Neural Networks - V Congresso Brasileiro de Redes Neurais , April 2-5, 2001 - PUC, Rio de Janeiro - RJ – Brazil.
- [7] FPGA-Based Fuzzy Logic: Design and Applications – a Review, Nasri Sulaiman, Zeyad Assi Obaid, Member, IACSIT, M. H. Marhaban and M. N. Hamidon, IACSIT Vol.1, No.5, December, 2009 ISSN: 1793-8236.
- [8] Image segmentation by using edge detection ,Mr. Salem Saleh amri, Dr. N.V. Kalyankar and Dr. Khamitkar S.D, IJCSE International Journal on Computer Science and Engineering Vol. 02, No. 03, 2010.

- [9] Fuzzy Logic Based Digital Image Edge Detection, Aborisade, D.O, Global journal of Computer science and technology, Vol.10 Issue 14 November 2010.
- [10] A New Approach for Edge Detection Using First Order Techniques, Shahana Baano, Dr.M.S. Prasad Babu, ED Nagendra Prasad, IJCST Vol. 2, Issue 1, March 2011 ISSN: 2229-4333 (Print) | ISSN: 0976-8491.
- [11] Performance Evaluation of Edge Detection Techniques for Images in Spatial Domain, Mamta Juneja, Parvinder Singh Sandhu, International Journal of Computer Theory and Engineering, Vol. 1, No. 5, December, 2009 1793-8201.
- [12] Image segmentation by using edge detection, Mr. Salem Saleh amri, Dr. N.V. Kalyankar and Dr. Khamitkar S.D, IJCSE International Journal on Computer Science and Engineering Vol. 02, No. 03, 2010.
- [13] Fuzzy Edge Filter-Edge Detection and Feature Extraction Technique for Any JPEG Image. Neha Agrawal, Rishabh Agrawal & Sushil Kumar, International Journal of Computer Science & Communication. Vol. 1, No. 2, July-December 2010, pp. 387-390
- [14] A Novel Approach for Edge Detection S.Lakshmi, Dr.V.Sankaranarayan, IJCSNS International Journal of Computer Science and Network Security, VOL.10 No.4, April 2010.
- [15] A Descriptive Algorithm for Sobel Image Edge Detection, O. R. Vincent, O. Folorunso, Proceedings of Informing Science & IT Education Conference (InSITE), 2009.
- [16] Edge Detection Techniques: Evaluations and Comparisons, Ehsan Nadernejad, Applied Mathematical Sciences, Vol. 2, 2008.
- [17] Performance Evaluation of Prewitt Edge Detector for Noisy Images Raman Maini, J.S.Sohal, GVIP Journal, Volume 6, Issue 3, December, 2006.
- [18] Theory of Edge Detection, D. Marr; E. Hildreth Proceedings of the Royal Society of London. Series B, Biological Sciences, Vol. 207, No. 1167. (Feb. 29, 1980), pp. 187-217.
- [19] A computational Approach to Edge Detection, John Canny. IEEE Transactions on Pattern Analysis and Machine Intelligence, VOL PAMI-8 NO 6 NOVEMBER, 1986.
- [20] Edge Detection Techniques for Image Segmentation – A Survey of Soft Computing Approaches, N. Senthilkumaran and R. Rajesh, International Journal of Recent Trends in Engineering, Vol. 1, No. 2, May 2009.
- [21] Fuzzy Sets (ppt) Neuro-Fuzzy and soft computing, First Edition, Prentice Hall, 1997.